



**ENVIRONMENTAL AND SOCIAL
MANAGEMENT PLAN FOR THE
PROJECT OF RECONSTRUCTION OF
THE BLACK SPOT ROUNDABOUT
„HUSINO“ IN TUZLA**

November, 2017

Table of Contents

EXECUTIVE SUMMARY		5
1. INTRODUCTION		9
2. METHODOLOGY AND OBJECTIVES OF ESMP		10
3. LOCAL DESCRIPTION		11
3.1. ROAD SAFETY AND TRAFFIC DATA		12
4. PROJECT DESCRIPTION		14
4.1. EXISTING CROSSROAD		14
4.2. NEW DESIGN		15
5. BASELINE OF PARTICULAR INTEREST		17
5.1. GEOGRAPHIC CONDITIONS		17
5.2. CLIMATE FEATURES		18
5.3. AIR QUALITY		19
5.4. WATER AND WATER QUALITY		19
5.5. NOISE LEVELS		20
5.6. LAND AND LAND USE		21
5.7. FLORA AND FAUNA		22
5.8. PROTECTED AREAS		22
5.9. POPULATION AND SETTLEMENTS		22
6. DESCRIPTION OF POSSIBLE IMPACTS DURING CONSTRUCTION, OPERATION AND MAINTENANCE		24
6.1. PRE-CONSTRUCTION IMPACTS		24
6.2. IMPACTS DURING CONSTRUCTION		26
6.3. IMPACTS DURING OPERATION AND MAINTENANCE		29
6.4. POSITIVE IMPACTS		29
6.5. ENHANCEMENT MEASURES		30
7. MITIGATION MEASURES		31
7.1. MITIGATION MEASURES IN PRE-CONSTRUCTION PHASE		32
7.1.1. Contractor Management		32
7.1.2. Land acquisition and Involuntary Resettlement		34
7.2. MITIGATION MEASURES DURING CONSTRUCTION PHASE		34
7.2.1. Environmental Management.....		34
7.2.2. Health and Safety.....		35
7.2.3. Traffic and Road safety.....		37
7.2.4. Construction Site Safety.....		41

7.2.5.	Land Acquisition, Involuntary Resettlement and Economic Displacement ..	41
7.3.	MITIGATION MEASURES IN OPERATIONAL PHASE.....	41
7.4.	SUMMARY OF MITIGATION MEASURES	42
8.	ENVIRONMENTAL MONITORING PROGRAM.....	52
9.	IMPLEMENTATION AND REPORTING	58
9.1.	PROJECT IMPLEMENTATION.....	58
9.2.	REPORTING PROCESS.....	58
9.2.1.	Contractor to PC Roads FBH	58
9.2.2.	Supervision Engineer to PC Roads FBH	59
9.2.3.	PC Roads FBH to WB.....	59
10.	PUBLIC DISCUSSION AND INFORMATION DISCLOSURE.....	60
10.1.	PUBLIC CONSULTATION.....	60
10.2.	INFORMATION DISCLOSURE.....	60
10.2.1.	Grievance Mechanisms	60
11.	Requirements for start of works.....	62
11.1.	Social aspects.....	62
APPENDICES.....		63
APPENDIX 1. GRIEVANCE FORM.....		64
APPENDIX 2. GRIEVANCE REGISTRATION TEMPLATE TABLE.....		65
APPENDIX 3. REPORT ON PUBLIC DISCUSSION.....		66

List of Figures

Figure 1:	The geographical location of the project.....	11
Figure 2:	Lookup Map of Wider Area with the Project Location	12
Figure 3:	The average amount of vehicles per day in the year 2015.....	13
Figure 4:	The Existing Crossroad.....	15
Figure 5:	New design	15
Figure 6:	Geographical Map of Wider Area with the Project Location	17
Figure 7:	Geologic Map of the wider area of the Project	18
Figure 8:	Hydrographic Map of the wider area of the Project	20
Figure 9:	Land use in the wider area of the project according to CORINE model	21
Figure 10:	Location of project crossroad	23
Figure 11:	Planned expropriation on project crossroad	24
Figure 12:	Fruit/vegetable truck that needs to be relocated due to project activities.....	26
Figure 13:	Scheme of traffic flow during construction	40
Figure 14:	Scheme of traffic signage that will be used during construction period	40

List of Tables

<i>Table 1: Traffic prognosis for the M18, sections Šićki Brod-Husino and Husino- Živinice</i>	<i>13</i>
<i>Table 2: Average temperature and precipitation for the multi-year period</i>	<i>19</i>
<i>Table 3: Excerpt from the RAP Census (inventory of impacted private parcels)</i>	<i>25</i>
<i>Table 4: Enhancement Measures</i>	<i>30</i>
<i>Table 5: Environmental and Social Impacts Management Plan.....</i>	<i>42</i>
<i>Table 6: Environmental and Social Monitoring Program</i>	<i>53</i>

LIST OF ABBREVIATIONS

BH	- Bosnia and Herzegovina
CFD	- Central Feedback Desk
CSOP	- Construction Site Organization Plan
EIB	- European Investment Bank
EIA	- Environmental Impact Assessment
EMP	- Environmental Monitoring Program
ESMF	- Environmental Social Management Framework
ESMP	- Environmental and Social Management Plan
EP	- Environmental Permit
FBH	- Federation of Bosnia and Herzegovina
FMoET	- Federal Ministry of Environment and Tourism
IFI	- International Financial Institutions
MP	- Main project
MPCA	-Management Plan in Case of Accidents
OP	- Operational Policy of the World Bank
PAP	- Project Affected Person
PPE	- Personal Protective Equipment
PCRoadsFBH	- Public Company Roads of the Federation of Bosnia and Herzegovina
RAP	- Resettlement Action Plan
RPF	- Resettlement Policy Framework
TD	- Tendering Documentation
TMP	- Traffic Management Plan
WB	- World Bank
WMP	- Waste Management Plan
<i>AEHS</i>	<i>- Annual Environmental Health and Safety</i>

EXECUTIVE SUMMARY

INTRODUCTION AND OBJECTIVES OF ESMP

Reconstruction of the Black spot roundabout Šićki Brod 3 – Živinice 1 km 2+500 on the Major road M-18, section 006 Šićki Brod 3 – Živinice 1 in Tuzla (the Project) for which this ESMP is developed, is one of the sub-projects under the FBH Road Sector Modernization Project co-financed by the WB and EIB. Reconstruction of the Black spot roundabout Šićki Brod 3 – Živinice 1 km 2+500 "Husino" on the Major road M-18, section 006 Šićki Brod 3 – Živinice 1 is screened as a category B project according to the Operational Policies (OP 4.01 on Environmental Assessment) of the WB as well as the screening procedure outlined in the project-specific ESMF. As such, this activity needs to have an ESMP developed, whereas pursuant to the local legislation this project does not require an environmental assessment or an environmental permit - whether federal or cantonal. PC Roads FBH will ensure all required local permits for this Project are obtained.

LOCATION AND TRAFFIC DESCRIPTION

The Project is situated at the intersection of the major road M-18, section section 006 Šićki Brod 3 – Živinice 1 at the km 2+500, a bypass of Tuzla, and two local roads in Tuzla City in the settlement Husino. According to PC Roads FBH, in the period between 2009 and 2013 39 traffic accidents occurred. The nearest relevant traffic count device in Živinice shows that in 2015, 14467 vehicles were passing daily.

PROJECT DESCRIPTION

The location Husino is a junction of 3 city streets and the main road M18. Based on data presented in section 3.1. Roads Safety and Traffic data , the fact that this junction is not adequate, and is deemed as a black spot is reflected in the high number of accidents at the location. Within the scope of the project task it is envisaged that the project solution is designed as a roundabout.

BASELINE OF PARTICULAR INTEREST

The terrain of the Project is mostly with an altitude ranging from 250 to 300 meters above sea level. Meteorological station in Tuzla, closest to the site of reconstruction, reports following data: the average multi-annual temperature is 10.4 ° C and the average rainfall measured at the same meteorological station, during multi-year period is 926 mm per year. Based on the analysis of the data from the Cantonal air quality monitoring system, it can be said that the air quality from spring to early autumn is of relatively satisfactory quality, and in the period from early autumn to spring of far poorer quality. Occasionally the air quality at certain locations corresponds to the polluted and excessively polluted air. The main air pollutants in the area of Tuzla are industrial plants, and pollution from the traffic of the

major road. Also, during the winter time, the air is loaded with the pollution that comes from individual furnaces and boiler units, from residential facilities. Jala River is the closest surface water flow, approximately 1 km of air distance from the Project location. In close proximity to the Project area, we can find mostly facilities for business purposes (stores) and residential purposes (houses) which are exposed to the traffic noise and according to the Law on Noise Protection, they fall under the fifth zone, where allowed noise levels are 65 dBA during day and 60 dBA at night. The entire wider and narrower area of the planned project was greatly changed i.e. the entire area is urbanized. In the closer Project area there is neither flora nor fauna. In the vicinity of the location of the Project is not located within a protected area

The city Tuzla is an administrative, business, cultural, health and educational center in the Tuzla Canton. The municipality Tuzla has an area of 294 km² and the population of 110979 people according to the 2013 census. The population density is 377,5 ppl/km² making it one of the most dense populated municipalities in Bosnia and Herzegovina. The project crossroad is located on a route that connects the municipalities Živinice, Banovići and Kladanj to the cantonal center Tuzla. The importance of the project crossroad for the local community is reflected through the fact that this is the fastest and most convenient way for inhabitants of the northern and western parts of the canton to reach the administrative, healthcare, educational and administrative center of the municipality, the city Tuzla. Furthermore, the planned reconstruction would greatly improve the safety of pedestrians including children who in a great part cross the project crossroad every day on their way to school.

IMPACTS DURING PRECONSTRUCTION

Socio economic impacts: The project roundabout is a part of the integrated Resettlement Action Plan (RAP) for 9 sub-projects which was publicly consulted and disclosed in March 2016. As described in the integrated RAP, small parts of 10 private and 12 public land plots will be expropriated. The area affected on 9 private land plots is 10% or less of the total land area, while 25% of land is affected on one land plot (plot number 379).

IMPACTS DURING CONSTRUCTION

The main impacts associated with the construction works include: emissions from the machinery used on site, dust generation from works, potential increases in noise and vibration levels, impact on soil and water from accidental leaks and spills and safety impacts. The contractor is bound by the provisions of this ESMP to conduct a baseline of the biological and natural resources specific to the site, and to adapt the measures of the ESMP and their work performance based on such findings.

Impact on traffic safety and traffic flow: Traffic congestion and obstructions on road section - increased traffic flow, leading to congestion and obstruction is likely to be experienced on major road M18 during the construction. No complete traffic stoppage is likely to occur due

to construction activities of the project roundabout. Trenches are likely to be made during implementation of construction activities, including earthworks and temporary storage of construction material. Population Safety Impacts: The impact regarding the presence of workers is minor, because, according to local practice no working camp will be set up. Safety issues regarding local population can occur due to the vicinity of the construction site

Socio-economic impacts: At this time, it is not expected that it will be necessary to temporarily occupy any privately owned land plots for lodging machines and disposal of materials. Machines and materials will be disposed on land alongside road owned by the investor. Likewise, no access restrictions are expected during the construction period. However, if additional temporary occupation of private land is needed during construction activities, this will be agreed upon with respective land owners and compensation will be paid in accordance with provisions determined in the Integrated Resettlement Action Plan (integrated RAP) and the Resettlement Plan Framework (RPF) before the land is accessed. New business opportunities are expected to be created for local businesses such as transporters, suppliers and other service providers. This impact is considered to be short-term and small due to small scope of civil works. Following adverse impacts on living conditions during construction are expected: noise

MITTIGATION MEASURES

The mitigation measures focus on the major identified impacts during works, such as emissions from the machinery used on site, dust generation from works, potential increases in noise and vibration levels, impact on water and soil from accidental leaks and spills and safety impacts, waste management, impacts on living conditions, temporary occupation and restrictions on land use, impacts on local traffic.

ENVIRONMENTAL MONITORING PROGRAM

The monitoring measures focus on the major identified impacts during works, such as emissions from the machinery used on site, dust generation from works, potential increases in noise and vibration levels, impact on soil and water from accidental leaks and spills and safety impacts, waste management, impacts on living conditions, temporary occupation and restrictions on land use, impacts on local traffic.

IMPLEMENTATION AND REPORTING

PC Roads FBH is the implementer of the project and will be responsible for the implementation and compliance of the project in line with ESMP. The Contractor will be responsible for the implementation of the environmental mitigation measures during construction.

PUBLIC DISCUSSION AND INFORMATION DISCLOSURE

Public consultation of the subject ESMP was organized in Tuzla after the WB approved the draft of the ESMP. The record on public discussion, that is, grievances presented at the public discussion shall be recorded in the Grievance Register, and opinions and suggestions of the public shall be integrated into the final ESMP. ESMP draft was available on the website of PC Roads of the (www.jpccfbih.ba) in a local language and on the website of the World Bank in English. During the process of public consultation the interested public got all information regarding the project, including social and environmental issues.

Grievance Mechanism: Besides the institutionally available ordinary and extraordinary legal remedy, and existing institutional channels, PC Roads FBH will ensure and form a special Grievance Redress Mechanism in collaboration and direct involvement of those municipalities under whose administrative authority the project is carried out, in this case with the Tuzla municipality. Grievance Redress Mechanism designed for this project is the Central Feedback Desk (CFD) at the level of the implementing agency PC Roads FBH which shall serve as both Project level information center and grievance mechanism, available to those affected by implementation of all project sub-components. The CFD shall serve the persons affected directly or indirectly by construction works. All grievances will be archived in the register and assigned a number, and acknowledged within 3 working days. The CFD will make all reasonable efforts to address the complaint upon the acknowledgement of grievance. If the CFD is not able to address the issues raised by immediate corrective action, a long-term corrective action will be identified. The complainant will be informed about the proposed corrective action and follow-up of corrective action within 14 working days upon the acknowledgement of grievance.

Requirements for start of works

The Contractor shall establish all required baseline data before the commencement of works. The Baseline – Monitoring data shall include air quality data, soil quality data, survey of the site for any endangered and endemic species and other environmental issues in zone of corridors of direct and indirect impacts.

The Contractor shall develop a Construction Site Organization Plan (CSOP) that is made up of a Implementation Plan of this ESMP, a detailed Waste Management Plan (WMP), Study on Safety (includes Elaborate on Safety at Work and Elaborate on Protection From Fire and Explosions), and a Traffic Management Plan (TMP) must be developed, which will be created by the Contractor prior to the beginning of construction works.

Social aspects: - Implementation of the integrated RAP and Payment of the compensation in accordance with RAP provisions before the land is accessed.

1. INTRODUCTION

Based on the guidance and requirements from the Environmental and Social Management Framework (ESMF has been disclosed and available to the public in local language on the website of PC Roads Federation of Bosnia and Herzegovina (FBH) in March 2016, <http://jpcfbih.ba/bs/aktivnosti/modernizacija-magistralnih-cesta/38>), this site-specific Environmental and Social Management Plan (ESMP) has been prepared.

The Public Company Roads of Federation of Bosnia and Herzegovina (further in the document PC Roads FBH) has initiated an overarching program for the project "Modernization of Major roads in the Territory of the Federation of Bosnia and Herzegovina" (The Program) to ensure appropriate road infrastructure by 2020. For this purpose, it has been requested from the Government of the FBH to ensure credit funds from international finance institutions (IFI).

In the framework of the abovementioned umbrella Program, the Public Company "Roads of FBH" (PC Roads FBH), a limited liability company wholly owned by the Government of FBH, has initiated the FBH Road Sector Modernization Project. FBH filed an application for a credit/loan from the European Investment Bank (EIB) and from the World Bank (WB) in total amount of 103,38 million EUR for funding abovementioned Project.

FBH Road Sector Modernization Project comprises several small and mid-sized investment schemes including:

1. This component includes reconstruction of roads:
 - Construction works for completion of the construction of major road M17.3 Neum–Stolac (in total 32,9 km);
 - Construction of third lanes for slow vehicles (in total 40km on 8 sections of major roads);
 - Reconstruction of roadway, correction of axes (in total 18 km on 5 sections of major roads, where a correction of axes is to be done on one section only in the length of 1 km),
 - Reconstruction of 3 tunnels (with a total length of 1,86 km);
 - Reconstruction of 7 bridges (with a total length of 0,55 km).
2. Interventions on improving road safety: The reconstruction of intersections, which are classified as "black spots" on major roads, in total 9;
3. Institutional reforms: Road Management in the FBH with a particular focus on sustainability of investments and road safety;
4. Project Implementation Support: Construction supervision and capacity building of the PC Roads FBH.

Reconstruction of the Black spot roundabout Šićki Brod 3 – Živinice 1 km 2+500 on the Major road M-18, section 006 Šićki Brod 3 – Živinice 1 in Tuzla (the Project) for which this ESMP is developed, is one of the sub-projects included in the group of sub-projects co-financed by the WB and EIB.

2. METHODOLOGY AND OBJECTIVES OF ESMP

Reconstruction of the Black spot roundabout Šićki Brod 3 – Živinice 1 km 2+500 "Husino" on the Major road M-18, section 006 Šićki Brod 3 – Živinice 1 is screened as a category B project according to the Operational Policies (OP 4.01 on Environmental Assessment) of the WB as well as the screening procedure outlined in the project-specific ESMF. As such, this activity needs to have an ESMP developed, whereas pursuant to the local legislation this project does not require an environmental assessment or an environmental permit - whether federal or cantonal¹. PC Roads FBH will ensure all required local permits for this Project are obtained.

This ESMP aims at identifying all of the potential environmental and social impacts associated with this project activity. As such, the ESMP includes mitigation measures for all identified potential impacts that are to be undertaken throughout the different phases of the project including preparation, implementation and operation. The measures set forth in this ESMP are meant to avoid, neutralize or diminish adverse environmental and social impacts if not completely then to a satisfying level.

The ESMP identifies feasible and cost-effective measures which can reduce potentially negative impacts on the environment and society to an acceptable level. If mitigation measures are not possible, profitable or sufficient, compensation should be included as the last measure.

In order to ensure mitigation measures have been implemented, fully or partially, the ESMP sets forth a monitoring plan to be implemented during the specific stages of project preparation/designing and implementation. Monitoring during project preparation and implementation provides information on the key environmental and social aspects of the project, particularly on the environmental and social aspects of the project and efficiency of mitigation measures. Prior to commencement of works, in accordance with requirements of the ESMP, and a minimum of monitoring requirements, described in this ESMP, without


¹ In FBH investments requiring EIA are identified by the Regulation on Plants and Facilities Subject to Obligatory Environmental Impact Assessment, and Facilities Which May be Constructed and Commissioned Only if Granted Environmental Permit (Official Gazette of FBH No. 19/04). Tuzla Canton investments requiring an EP are regulated by Regulation on Activities, Plants and Facilities Which May be Constructed only if Granted Environmental Permit (Official Gazette of Tuzla Canton, No. 3/05 and 9/07). Reconstruction of a crossroad is not a subject to neither a Federal nor a Cantonal EP.

limitation to these requirements, the Contractor shall prepare detailed list of mitigation measures and parameters to be monitored.

3. LOCAL DESCRIPTION

The Project is situated at the intersection of the major road M-18, section section 006 Šićki Brod 3 – Živinice 1 at the km 2+500, a bypass of Tuzla, and two local roads in Tuzla City in the settlement Husino. The major road M-18 connects the international border crossing of the first category „Rača“ with Serbia in the northeast and the international border crossing, also of the first category, „Hum“ with Montenegro. In addition, the major road M-18 is part of the international E-road network E762 that connects Sarajevo in Bosnia and Herzegovina and the Republic of Albania in Tirana, through Nikšić and Podgorica in Montenegro.

Figure 1: The geographical location of the project

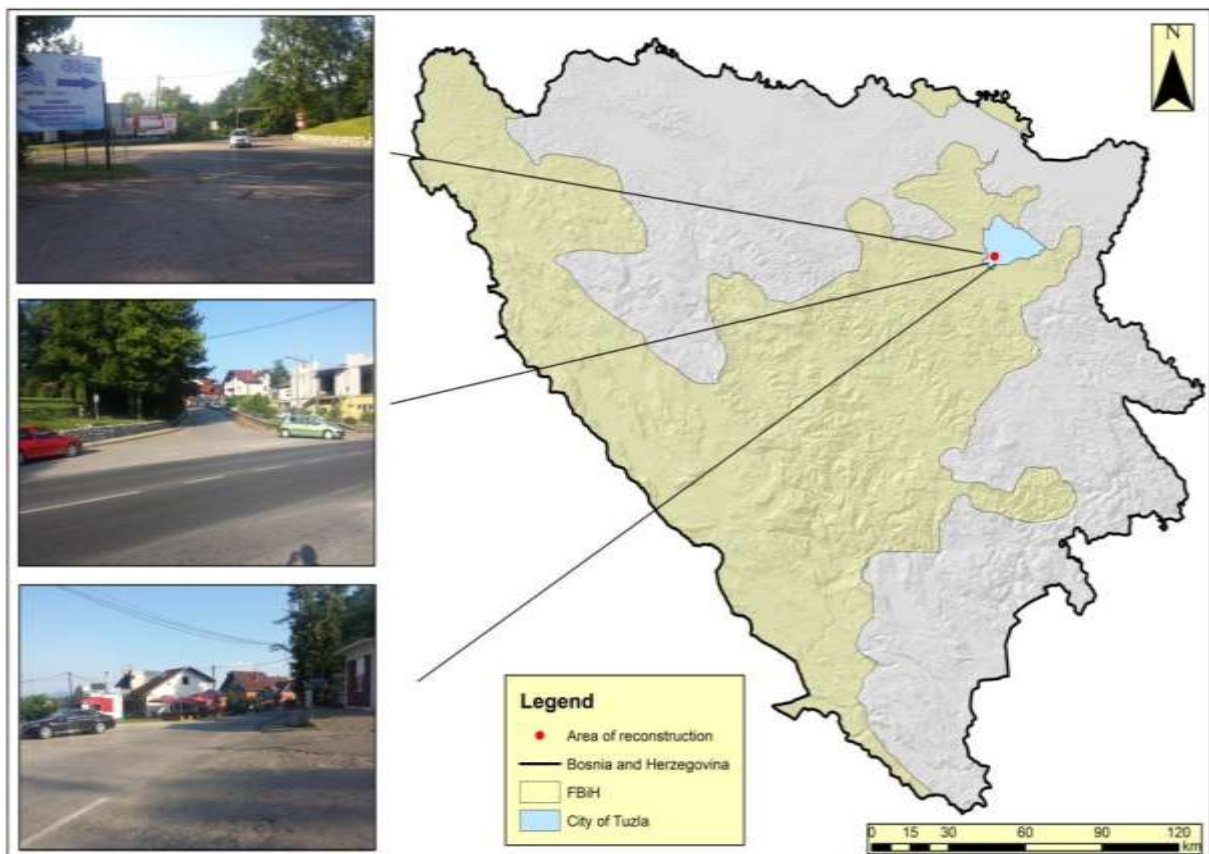


Source: PC Roads Federation of BH (Pictures: July 2017)

The subject of the project is the reconstruction of the intersection Šićki Brod 3 – Živinice 1 “Husino” consisting of 4 branches in the settlement Husino in City of Tuzla. The area of reconstruction is located within the urban area of Tuzla, and the area surrounding the

project is mainly used for commercial and residential purposes. Regarding public buildings, there is a postal office located near the crossroad.

Figure 2: Lookup Map of Wider Area with the Project Location

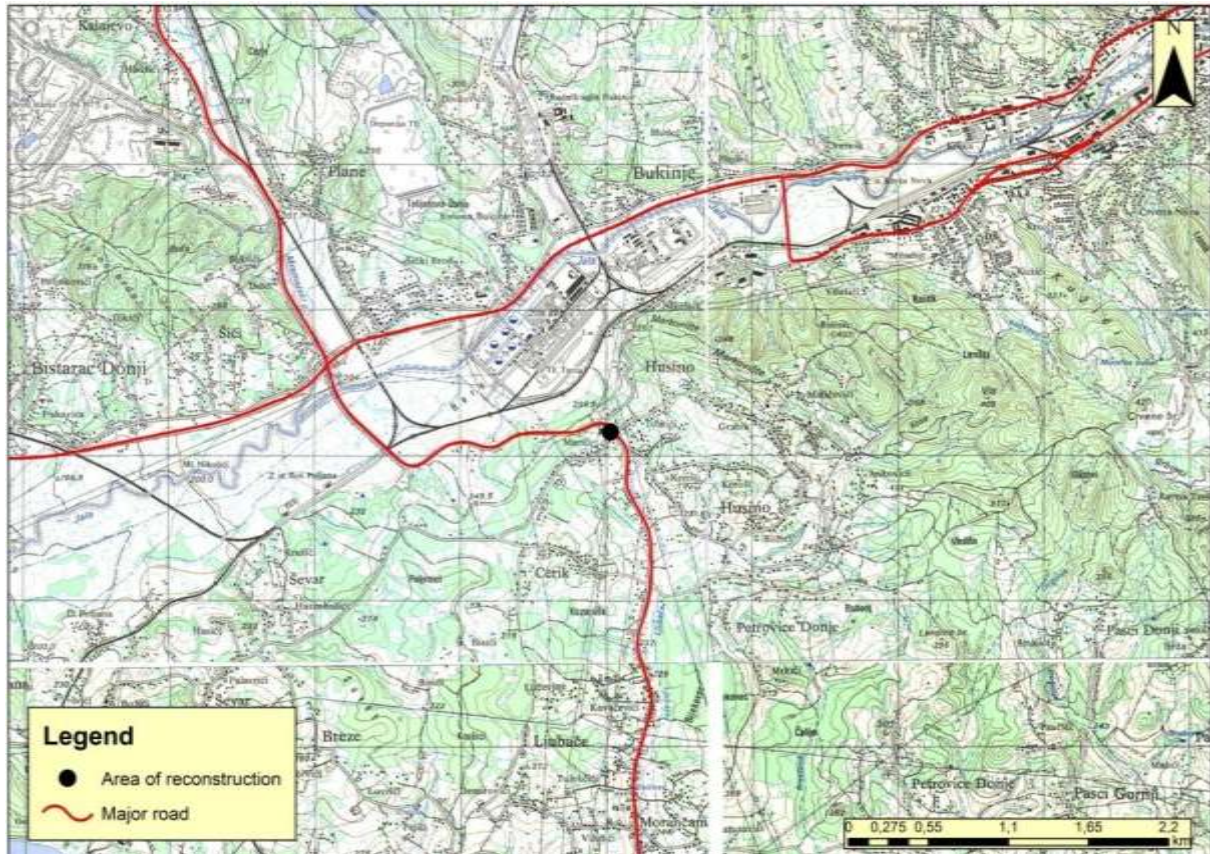

Source: PC Roads Federation of BH


3.1. ROAD SAFETY AND TRAFFIC DATA

According to PC Roads FBH, in the period between 2009 and 2013 there were no fatal road accidents on the project crossroad. However, in the same period 6 accidents with serious and light injuries and 33 accidents with material damage occurred on M18 section Šićki Brod-Živinice on which the project crossroad is located. Currently, the intersection is unsafe because of unregulated traffic flow which leads to confusion of drivers and disobedience of traffic rules.

Such a high number of accidents show the urgent need for the reconstruction of the project crossroad as a part of the respective section Šićki Brod-Živinice.

PC Roads FBH has installed automatic traffic counting along the major traffic network throughout FBH. Automatic traffic counting is being done since 2005 and last report² is published in 2016 with data for the previous year. Based on this information, the nearest relevant traffic count device is Živinice approximately 7 kilometers of the project crossroad. The data collected from the device shows that, in 2015, 14467 vehicles were passing daily (Figure 3).

Figure 3: The average amount of vehicles per day in the year 2015

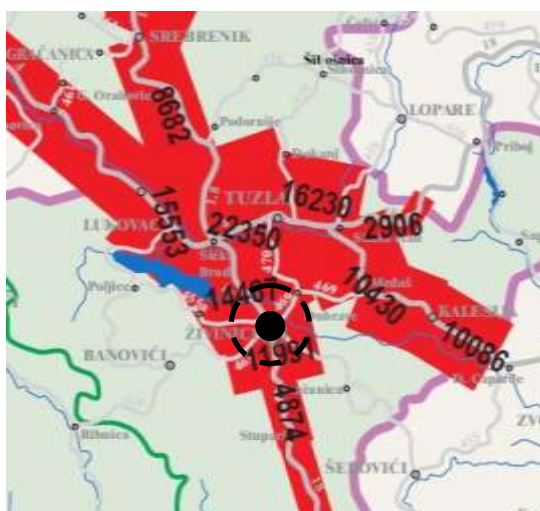

Source: PC Roads Federation of BH

By request of PC Roads FBH, traffic prognosis for the same network was made by IPSA Institute Sarajevo in 2014³ for the period 2013 to 2040. Analysis of the traffic flow was made for every year applying "equilibrium" procedure. The project crossroad is located on the end of section Šićki Brod-Husino and at the beginning of section Husino-Živinice. Thus traffic prognosis for both section are displayed in table1 where the amount of predicted average daily number of vehicles is shown.

Table 1: Traffic prognosis for the M18, sections Šićki Brod-Husino and Husino- Živinice

Major road	Section name	AADT									
		2016	2018	2020	2022	2023	2025	2030	2035	2037	2040
M18	Junction Šićki Brod-Husino	10176	10274	9864	5361	6115	6272	7211	8118	8606	9111
	Husino-Živinice	14793	15304	15239	10661	11240	11668	13390	15101	15819	16710

Source: PC Roads FBH, 2014

² "Traffic count on major roads in Federation of BH in 2015", PC Roads Federation BH, Sarajevo 2016

³ „Justification study for modernization of major roads in FBH programme“, IPSA Institute Sarajevo, 2014

Table 1 depicts a 40% decrease in the number of vehicles in year 2022. Reasons for such a rapid and sudden change in the AADT prognosis is the planned⁴ built of the corridor Vc5 and other alternative corridors which would lead to a decrease of vehicles on the project section. However the need for the reconstruction of the project tunnel is shown due to the very high current AADT and ASDT which already exceeded the estimates showed in table 1, as well as the importance of the project section and the bad current condition of the crossroad.

4. PROJECT DESCRIPTION

For the reconstruction of the intersection on the main road M18 in Husino, at chainage km 2 + 500.00, a preliminary design was designed by the Company DESIGN & QC d.o.o. Sarajevo. It gives the basic intersection concept solution with modified roundabout and solved connection of the surrounding local roads and was coordinated with representatives of the Municipality of Tuzla.

Based on this preliminary design the Main Project was developed by the same consultant.

4.1. EXISTING CROSSROAD


The existing state of the intersection is non-standard from the design point of view as shown on Figure 3. The results of such design are traffic congestions in the morning and afternoon. The non-standard solution does not allow for safe turning of heavy and personal vehicles due to unobstructed angles of rotation and vertical fracture of the highway level that occurs at the intersection itself, and represents a high security risk for entering vehicles *and also for vehicles moving along the main road*.

Therefore, *this requires its reconstruction with* modified and improved traffic solution concept. An additional problem of space limitations are private objects along the main road that are directly connected to it. Furthermore a memorial which is to dictate the geometry of the future design solution is located between the branches of Živinice and Husino.

⁴ according to the motorway in Corridor Vc; Feasibility Study

⁵ Corridor Vc connects Kiev (Ukraine) with Adriatic Sea through Lvov and Budapest (Hungary). It is consisted out of three parts and Vc is the part that follows European lane from Budapest (Hungary) to Ploče (Croatia), over Osijek (Croatia) and Sarajevo (BH). The longest part of the corridor Vc - 335 km passes through the territory of BH and it is laid on the most populated and most developed territory (over 50% of the BH population lives in 40 km range of the corridor Vc and earns over 60% GDP of the BH).

Figure 4: The Existing Crossroad

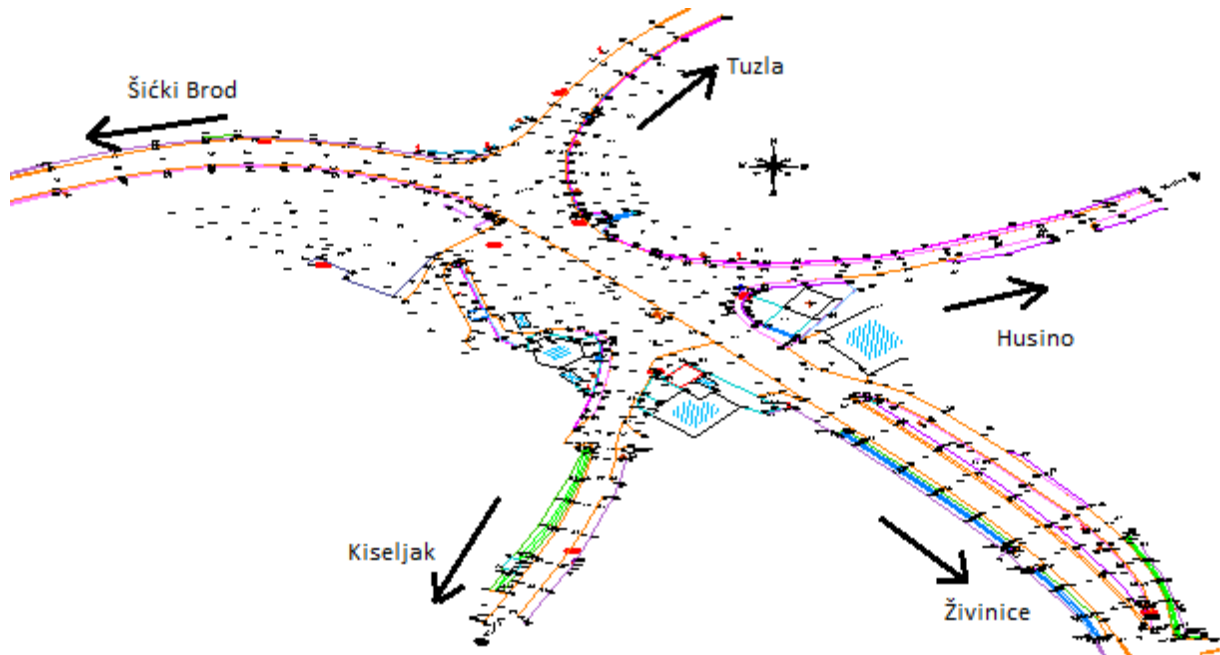

Source: Main Design, Design QC Ltd, October, 2014

4.2. NEW DESIGN

The adopted type of intersection reconstruction is a modified single-junction roundabout composed of two circular sections of the outer diameter 33m with a 6m wide lane and a 1,50m width transit which are interconnected by continuous traffic line width of 6 meters. As this is an unusual solution, the new designs shown in Fig.5.

Figure 5: New design



Source: Main Design, Design QC Ltd, October, 2014


The roundabout depicted on Fig.4. divides the M18 highway into two branches, which will be referred to as "Živinice", which is the connection of the M18 road from the direction of Živinice, and the branch "Šićki Brod" or M18 connector from the direction of the loop on Šićki Brod. The connection through the bypass to the Tuzla via Miladija, or the southern entrance to Tuzla, represents the "Tuzla" branch. The remaining two branches represent the local road connection to the Husino colony and similarly are called the "Husino" branch and the local road connection to the Kiseljak colony or the "Kiseljak" branch.

5. BASELINE OF PARTICULAR INTEREST

5.1. GEOGRAPHIC CONDITIONS

The terrain of the Project is mostly with an altitude ranging from 250 to 300 meters above sea level, as indicated in the next Figure. From stratigraphic – petrographical point of view this area is composed from stable and well permeable rocks, and from structural geomorphological point of view this type of relief belongs to the fluvial-accumulative type of morphostructure. Hydrogeological complexes are mostly with intergranular porosity aquifers.


Figure 6: Geographical Map of Wider Area with the Project Location

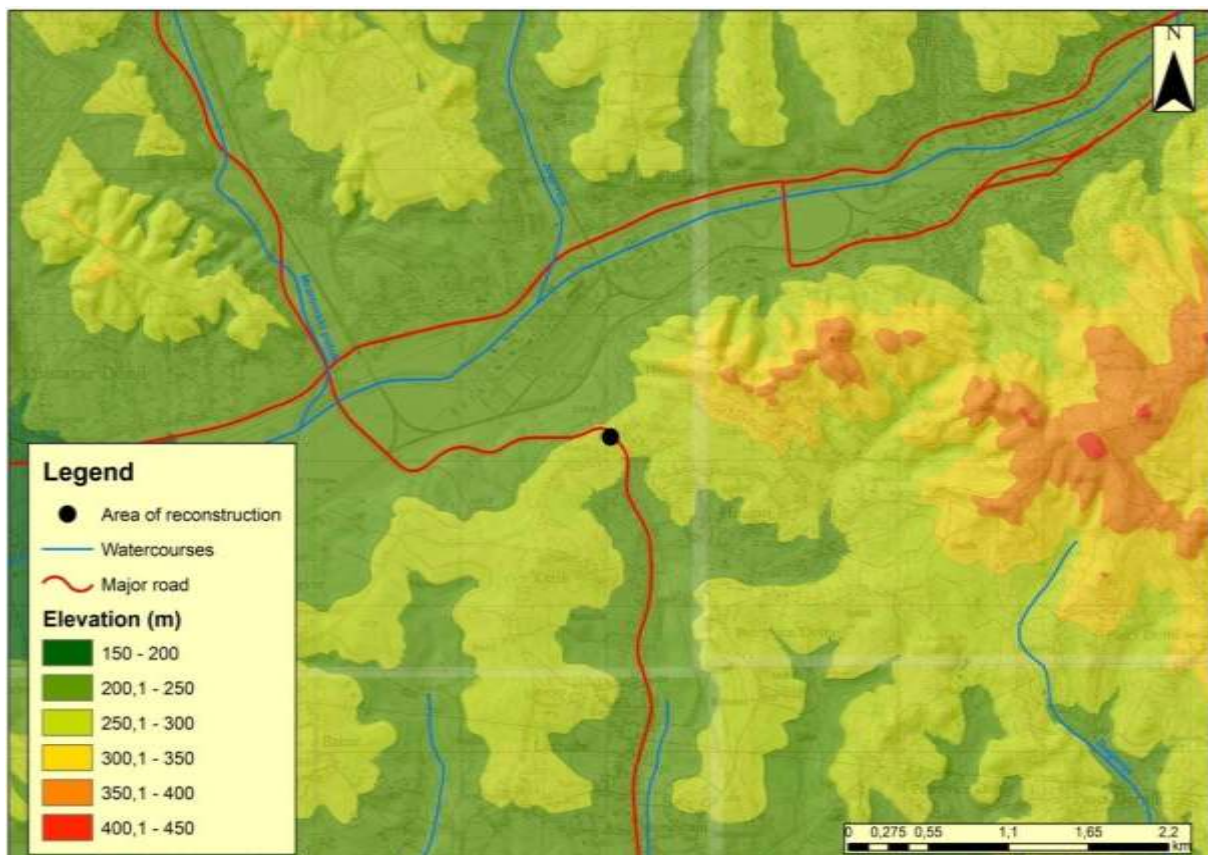

Source: PC Roads Federation of BH

The geological structure of the wider area is characterized by quaternary and pliocene rocks. Pliocene rocks are represented mostly through quartz sand with clays and coal layers. In addition to the above, sediments of quaternary age, which can also be found along watercourses in the area, are mostly represented through sand, gravel and aleuvolytes.

Figure 7: Geologic Map of the wider area of the Project

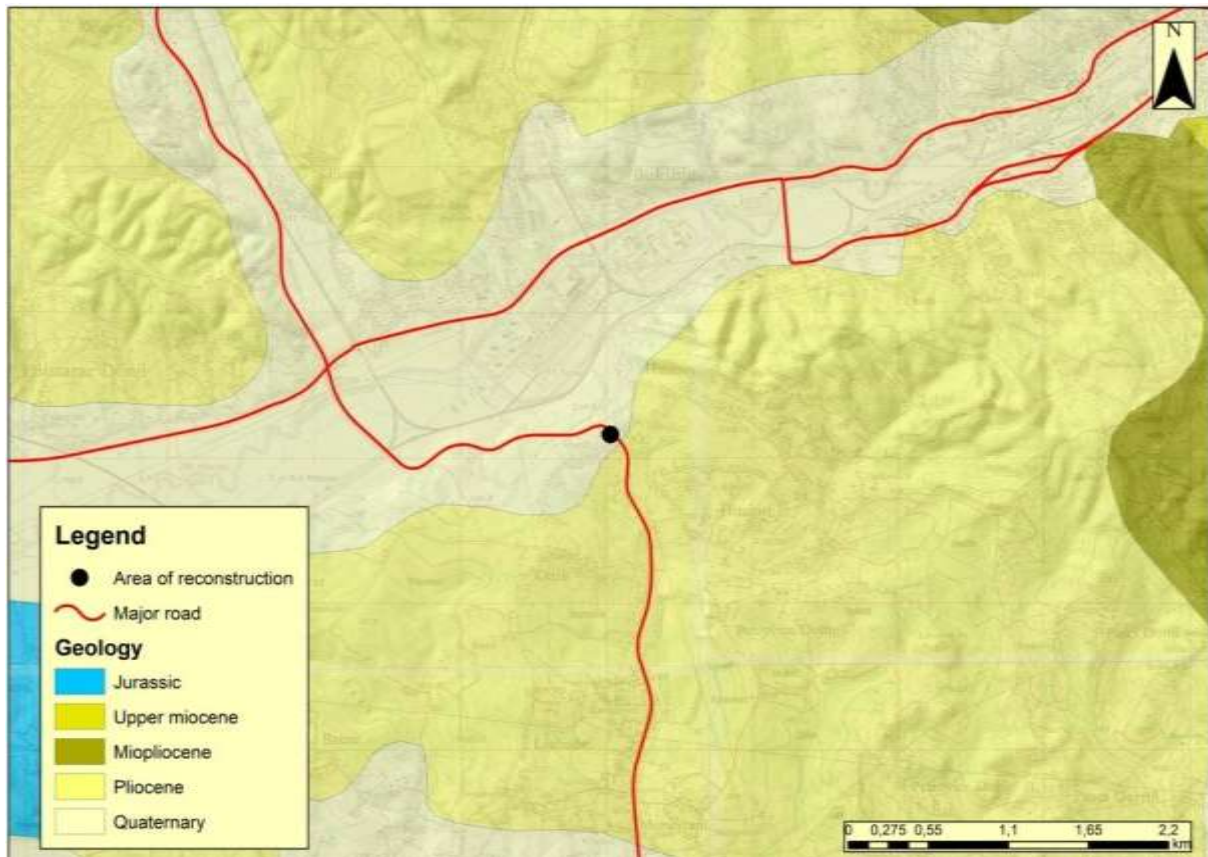

Source: *Draft of Spatial plan of FBiH 2008.-2028.*

5.2. CLIMATE FEATURES

Climatic features of subject area are determined by the thermal and pluviometric regime, and therefore it is necessary to define its basic parameters, using climatological monitoring and a detailed analysis of the same. It can be said that the entire area is under the influence of the moderate continental climate or moderately warm and humid climate type (Cfb climate according to Köppen climate classification) which can be concluded from the analysis of thermal and pluviometric regime.

Meteorological station in Tuzla, closest to the site of reconstruction, reports following data: the average multi-annual temperature is 10.4 ° C, the warmest month is July, with an average perennial air temperature of 19.9 ° C and the coldest month is January when the average perennial temperature is 0.6 ° C.

- Table 2. Average temperature and precipitation for the multi-year period

Month	I	II	III	IV	V	VI	VII	VIII	IX	X	XI	XII	Avrg./Su mm
Temperature (°C)	0,6	2,3	6,4	10,8	15,4	18,6	19,9	19,5	14,9	10,6	5,1	1,2	10,4
Precipitation (mm)	59,1	57,4	53,5	75,6	85	120,7	111,1	84,5	89,3	70,1	67,7	59,4	926

Source: Federal Hydrometeorological Institute

The average rainfall measured at the same meteorological station, during multi-year period is 926 mm per year. The rainiest month is June, when the average precipitation is 120,7 mm. The least precipitation occurs in March, only 53,5 mm on average. The annual rain regime of this area belongs to the continental pluviometric regime.

5.3. AIR QUALITY

Based on the analysis of the data from the Cantonal air quality monitoring system, it can be said that the air quality from spring to early autumn is of relatively satisfactory quality, and in the period from early autumn to spring of far poorer quality. Occasionally the air quality at certain locations corresponds to the polluted and excessively polluted air.

The main air pollutants in the area of Tuzla are industrial plants, and pollution from the traffic of the major road. Also, during the winter time, the air is loaded with the pollution that comes from individual furnaces and boiler units, from residential facilities. The Contractor shall conduct a baseline measurement for air quality monitoring prior to the start of works.


5.4. WATER AND WATER QUALITY

Jala River is the closest surface water flow, approximately 1 km of air distance from the Project location. Jala is a small river in northern part of Bosnia and Herzegovina. The Jala River springs in the area of the Majevisa Mountain (700 m above sea level), and flows into the river Spreča in Lukavac (186 m above sea level).

The most important tributaries of Jala are: Požarnička Jala with Kovačica river, Solina, Mramorski stream, stream Joševica, and Grabov, Tušanjski and Moluški stream. River Jala receives almost all wastewaters from the area of Tuzla. In the part of the flow, after receiving untreated wastewaters from the housing and industrial facilities, river Jala is

significantly burdened with various pollution (organic, inorganic, toxic, etc.), which is why it has a low quality (IV category and lower).

Figure 8: Hydrographic Map of the wider area of the Project

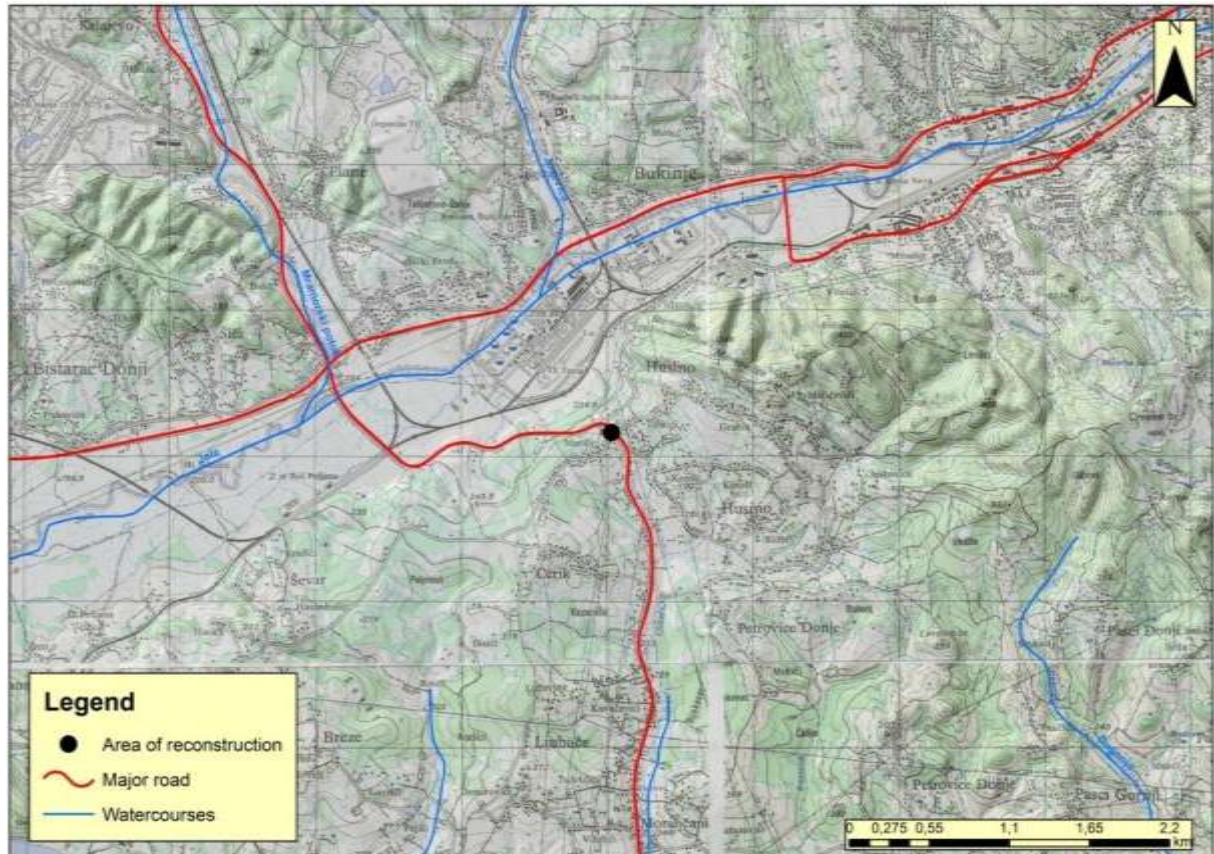

Source: PC Roads Federation of BH

5.5. NOISE LEVELS

There was no monitoring of noise levels near the Project area; therefore there is no available baseline data of the impact of the noise on the environment. The largest source of noise, in general, is traffic.


In close proximity to the Project area, we can find mostly facilities for business purposes (stores) and residential purposes (houses) which are exposed to the traffic noise and according to the Law on Noise Protection, they fall under the fifth zone, where allowed noise levels are 65 dBA during day and 60 dBA at night.

5.6. LAND AND LAND USE

In the vicinity of the Project the dominant land use is developed land in the form of residential facilities of individual housing and commercial buildings. Individual housing facilities mostly represent buildings which are mainly ground floor, one-story and two-story houses. Majority of the facilities are located along the major road M-18, and along bypass and local roads that are connected to the main road. Regarding public buildings, there is a postal office located near the crossroad.

In the vicinity of the crossroad, there is also a Memorial Park, a monument to the miners of the Husino rebellion, and a monument to the fallen defenders.

Figure 9: Land use in the wider area of the project according to CORINE⁶ model

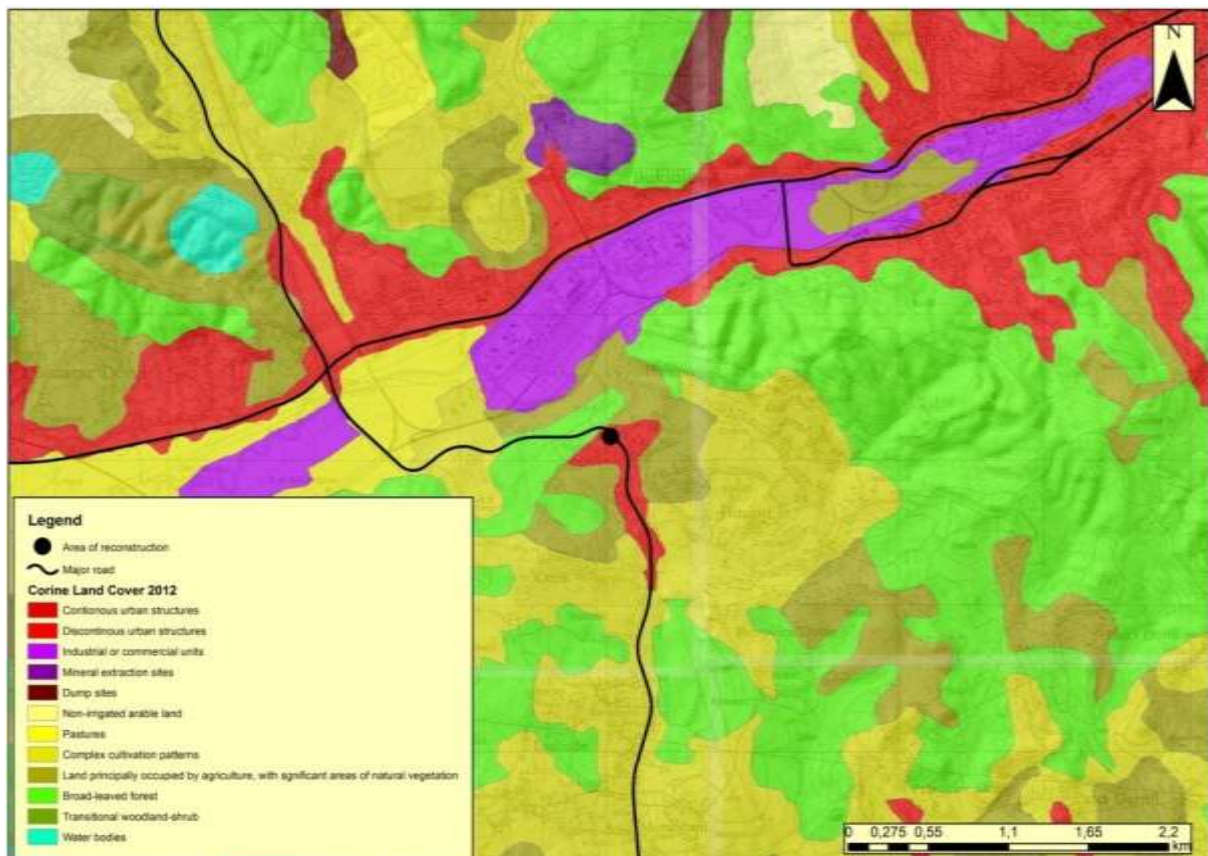

Source: *Coordination of information of the Environment, European Environment Agency*

⁶ *Coordination of information of the Environment - European Environment Agency*

5.7. FLORA AND FAUNA

The entire narrower area of the planned project was greatly changed i.e. the entire area is urbanized. However the Contractor shall hire a biologist to conduct a review of the site for the baseline prior to the start of works.

5.8. PROTECTED AREAS

The location of the Project is not located within a protected area according to Spatial plan of FBH and the Spatial plan of Tuzla. There are also no recorded archeological findings in the observed area.


5.9. POPULATION AND SETTLEMENTS

The city Tuzla is an administrative, business, cultural, health and educational center in the Tuzla Canton. The municipality Tuzla has an area of 294 km² and the population of 110979 people according to the 2013 census. The population density is 377,5 ppl/km² making it one of the most dense populated municipalities in Bosnia and Herzegovina. The project crossroad is located on a route that connects the municipalities Živinice, Banovići and Kladanj to the cantonal center Tuzla.

The crossroad is located at the western entrance to the city Tuzla in the settlement Husino. The location is characterized by mainly ground floor, one-story and two-story residential houses. Furthermore, the location is defined by various commercial and cultural activities depicted on figure 12 which shows the rapid urbanization of the area. Across of the project crossroad, a post office, a bakery, a memorial, a cultural center, a greengrocery, and a fast food restaurant are located. The rest of commercial activities are concentrated in the town center, located cca 4 km east from the area of construction works. The nearest primary school is located cca 300m from the project crossroad. Nevertheless, the majority of the population in the project area works and gravitates to Tuzla.

The importance of the project crossroad for the local community is reflected through the fact that this is the fastest and most convenient way for inhabitants of the northern and western parts of the Canton to reach the administrative, healthcare, educational and administrative center of the Canton, the city Tuzla. Furthermore, the planned reconstruction would greatly improve the safety of pedestrians including children who in a great part cross the project crossroad every day on their way to school.

Figure 10: Location of project crossroad

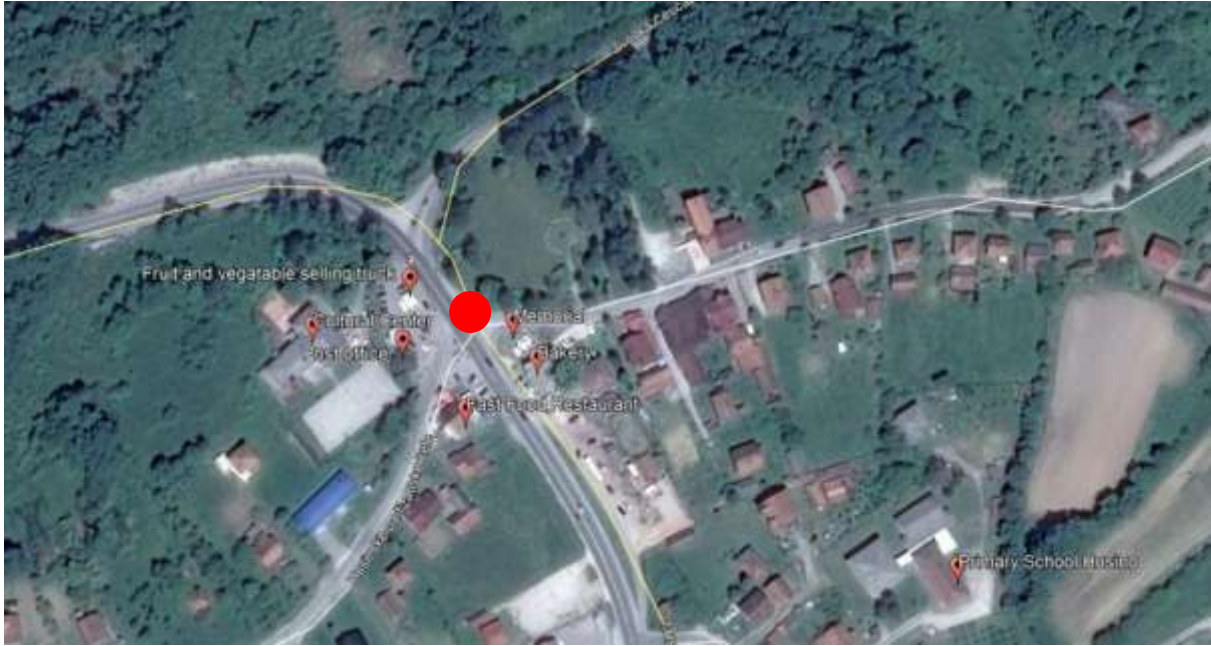

Source: PC Roads of FBH

6. DESCRIPTION OF POSSIBLE IMPACTS DURING CONSTRUCTION, OPERATION AND MAINTENANCE

6.1. PRE-CONSTRUCTION IMPACTS

Socio-economic Impacts

Pre-construction land acquisition: The project roundabout is a part of the integrated Resettlement Action Plan (RAP) for 9 sub-projects which was publicly consulted and disclosed in March 2016. As described in the integrated RAP, small parts of 10 private and 12 public land plots will be expropriated. The area affected on 9 private land plots is 10% or less of the total land area, while 25% of land is affected on one land plot (plot number 379).

Figure 11: Planned expropriation on project crossroad



Source: PC Roads of FBH

According to Table 3 one business located on a private land plot (2535/1) will be affected in means of expropriation of a part of the land plot it is located on. The affected part of land equals 1% of the entire area of the plot, thus no economic impact is expected. Furthermore, According to the integrated RAP Economic Displacement is defined as: "Loss of income streams or means of livelihood, resulting from land acquisition or obstructed access to resources (land, water or forest) resulting from the construction or operation of a project or

its associated facilities.”⁷ Based on this definition and the above said, no such impact can be indentified for this Sub-project. Thus, it can be concluded that no economic displacement will take place.

Furthermore, neither physical displacement nor permanent access restrictions have been identified on this project.

One roadside fruit and vegetable truck, depicted on figure 12 will have to be relocated from its usual spot on public land plot 2576 due to project activities. The truck will likely be moved to the remaining part of the same public land plot in close vicinity of its usual location.

Table 3: Excerpt from the RAP Census (inventory of impacted private parcels)

No.	Location (section)	Land plot no.	Type of impact	Category	Total area of plot (m2)	area affected	% affected	Other assets (natural objects)
1	Tuzla (Šićki Brodž - zivnice 1)	2534/1	Part of land	Land plot	205,00	4,10	2%	No
2		2535/1	Part of land	Business	328,00	4,09	1%	No
3		379	Part of land	Land plot	159,00	39,75	25%	Wood (undergrowth)
4		2993	Part of land	Land plot	550,00	5,50	1%	No
5		2536/1	Part of land	Land plot	949,00	9,49	1%	No
6		381	Part of land	Land plot	9623,00	962,30	10%	Wood (undergrowth)
7		2994/1	Part of Fence (30 m)	Land plot	2458,00	49,16	2%	No
8		2994/2	Part of land, part of Fence	Land plot	209,00	4,18	2%	No
9		2995	Part of land	Land plot	547,00	10,94	2%	No
10		2534/2	Part of land	Land plot	408,00	8,16	2%	No

⁷ Integrated Ressttlement Action Plan for Sub-projects, Enova Ltd. Marc, 2016

Figure 12: Fruit/vegetable truck that needs to be relocated due to project activities



Source: PC Roads of FBH, October 2017

6.2. IMPACTS DURING CONSTRUCTION

Impact on Air Quality

Exhaust gases - The machinery that is used during the construction and delays, i.e. traffic standstills on the road due to works on reconstruction of crossroad will lead to an increased emission of such gasses as SO₂, CO₂, CO, NO_X and Pb.

Dust generation - where the most important pollutants are solid particles (PM₁₀ and PM_{2,5}). Possible sources of dust generation include: site preparation activities, handling of building materials such as gravel, sand, asphalt, cement and the construction itself. The spreading of this pollution will depend on the weather conditions (wind strength and precipitation). The impact of dust emissions is not significant, it is temporary and of local character.

Impact on Noise Level and Vibrations

Noise emission is likely to appear during site preparation. Possible sources of noise are: ground preparation activities, use of tools and equipment, assembly of building materials on site; offloading of building materials such as gravel, sand, asphalt etc. and the work of construction machines in general.

Impact on Groundwater

Possible contamination of groundwater – may occur due to general construction activities and malpractice including inappropriate extraction of resource material, handling of hazardous substances (i.e. asphalt, chemicals and paint), inadequate waste handling, liquid and solid, equipment damage which may lead to leakage of lubricants and fuel (increased blurring, input of fats and oils) etc. These impacts can be avoided by working carefully, so the construction will not have a significant negative impact on the groundwater.

Impact on Soil Quality

- Soil compaction due to heavy machinery (vehicles and equipment for construction) moving around the location;
- Uncontrolled (storing, handling and depositing) and untreated waste is one of the major sources of pollution that can disrupt soil quality.

Impact on Biological and Natural Resources

- Pollution of soil with hazardous substances (fuel and oils in case of spills) can harm biodiversity of the surrounding area.

Impact on Protected areas

The observed project is not situated in any of the existing or planned protected areas.

Impact on Landscape Values

Partial alternation of landscape and visual aspects can be expected with organization of construction sites, presence of personnel and machinery on site. These impacts are temporary and negligible.

Impact on Traffic Safety and Traffic Flow

Traffic congestion and obstructions on road section - increased traffic flow, leading to congestion and obstruction is likely to be experienced on major road M18 during the construction.

No complete traffic stoppage is likely to occur due to construction activities of the project roundabout.

Trenches are likely to be made during implementation of construction activities, including earthworks and temporary storage of construction material.

Population Safety Impact

According to local practice, no working camps will be set up for the purpose of accommodation of workers. All workers will commute daily to the construction site. Thus the impact of worker's presence on local community is minor. **The vicinity of the construction site:** safety issues regarding local population that can occur due to the vicinity of the construction site includes:

- Inadequate noise levels that can impact the health of the local population
- Illicit entrance to the construction sites by local population (children)
- Reconstruction also may lead to interruption of land use by inadequate waste management in terms of uncontrolled and untreated waste (e.g. accidental spills from construction machinery, solid waste generated by workers on the construction site) that might be harmful to local communities.

Socio-Economic Impacts

Temporary land use and damage to private property: At this moment it is not expected that it will be necessary to temporarily occupy any privately owned land plots for lodging machines and disposal of materials. Machines and Materials will be disposed on land owned by the Investor alongside the project road. However, if temporary occupation of private land is needed during construction, this will be agreed upon with respective owners and the compensation will be paid in accordance with provisions determined in the RPF and Integrated RAP before the land is accessed.

Impacts on businesses in the vicinity of the construction site: according to the integrated RAP 2 businesses will be affected by expropriation. Both were surveyed and the results have been integrated in the concerned RAP.

The impacts perceived as possible during the construction period by the surveyed business owners are:

- Loss of customers
- Disruption of business due to construction works
- Noise,

While all said that access difficulties would be unavoidable.

These impacts are considered major but short termed

Access restrictions: No access restriction to nearby residential or any other facilities is expected during construction works.

New workplaces and impacts on local businesses (positive): New business opportunities are expected to be created for local businesses such as transporters, suppliers and other service providers. The project is expected to have positive impact on the local employment opportunities with opening new workplaces during road construction. This impact is considered to be short term and small due to small scope of civil works.

Impact on living conditions of local communities

Following adverse impacts during construction are expected:

- Traffic disruptions,
- Noise increase,
- Inappropriate disposal of construction waste,

- Disruptions to water and electricity supply, telephone and Internet connections, waste collection, regular public transport, delivery of mail,
- Potential hazards from the proximity of construction activities.
- Local businesses can be affected in means of late delivery of goods and products. The impact is short termed and minor due to the expected short duration of civil works.

6.3. IMPACTS DURING OPERATION AND MAINTENANCE

Since this crossroad is an already existing object neither new negative impacts, nor deterioration of existing negative impacts, during operation and maintenance are expected.

6.4. POSITIVE IMPACTS

Project implementation will have positive impacts on the quality of life of the local community. There are several social opportunities that were detected in the project:

- More efficient and safer traffic system: by decreasing the time of travelling, lower number of traffic accidents, lower costs of maintenance and management;
- Improvement of transport system and accessibility;
- Developed road structure with improved access to and out of the project area;
- Benefits to vehicle users and users of public transportation due to improved traffic connections and capacity;
- Lowering traffic congestions by increasing traffic flow;
- Increased travel speed and travel quality;

6.5. ENHANCEMENT MEASURES

- Table 4: Enhancement Measures

Impact	Improvements to be achieved	Cost Assessment (US\$)		Institutional Responsibility	
		Operative	Implementation	Operative	Implementation
▪ Traffic	<ul style="list-style-type: none"> ▪ Better traffic flow; ▪ Reduction in time travel and cost by enhancing road surface and building a roundabout; ▪ Improved road and travel safety; Increased pedestrian safety by designing footpaths.	-	-	Contractor	PC Roads FBH
▪ Socio-economic	<ul style="list-style-type: none"> ▪ New job and business opportunities for local construction workers and firms (temporary); ▪ Improvement of connections of local population to the municipality and cantonal center Tuzla 	-	-	Contractor	PC Roads FBH
▪ Air	<ul style="list-style-type: none"> ▪ Due to construction of the roundabout, there will be less congestion, meaning the emissions of traffic pollutants will decrease what will as a result have better air quality; 	Included in construction works	Included in supervision	Contractor	PC Roads FBH

7. MITIGATION MEASURES

The purpose of this ESMP is to set forth mitigation measures associated with the environmental impacts identified for this given project activity. The mitigation measures are included in this section and summarized in Table 5. This chapter includes also the general provisions and mitigation measures that the contractor hired for reconstruction will need to obey and/or perform. The requirements that the Contractor needs to follow, beyond the provisions of the ESMP, will be outlined in a number of planning documents (plans) that will be developed by the contractor prior to any start of works. The development of such documents will allow for adjustments of the ESMP measures based on the potential new findings on the site, as a result of the public consultations or developing the project specific baseline.

As a part of Tendering Documents (TD) for the Contractor, PC Roads FBH will require that the Contractor submit a Construction Site Organization Plan (CSOP), which will highlight certain requirements both for completion of works and implementation of mitigation measures.

CSOP consists of following components⁸:

- (i) Description of the preparation works and description of location organization during and after the construction (design of access roads, internal roads, manipulative and parking spaces, layout of installations, design and organization of temporary construction site facilities, terrain rehabilitation upon completion of works). This part of CSOP needs to contain technical description, calculation and graphical appendices, and BoQ.
- (ii) Technological scheme (location and operation of the storage and disposal sites of the materials, location of the mechanization maintenance, disposal sites for special types of waste, storage of dangerous and harmful substances). This part of CSOP needs to contain technical description, calculation and graphical appendices, and BoQ.
- (iii) Elaborate on safety (Elaborate on safety on work and Elaborate on protection from fires and explosions), which shall include according to provision of this ESMP a Management Plan in Case of Accidents (MPCA); and
- (iv) Practical plan of the implementation of this ESMP and among other a detailed Waste Management Plan (WMP)].

Additional request for the Contractor, as stipulated by ESMF and this ESMP, is to design and submit a detailed Traffic Management Plan (TMP) 30 days prior to commencement of

⁸Ordinance on Construction Site Organization, Mandatory Documents on Site and Participants in Construction (Official Gazette of the FBH No.48/09)

works (in accordance with Appendix 4. Road Safety Management of the ESMF). The TMP shall also include management of traffic according to the season, notably trying to minimize impacts during the summer months.

Within the framework of the project, PC Roads FBH prepared a Resettlement Policy Framework (RPF) which clarifies land acquisition/resettlement and compensation principles, organizational arrangements and procedures for planning land acquisition/resettlement. The RPF also serves as a guide for preparation of site-specific Resettlement Action Plans (RAPs). This sub-project is included in the Integrated RAP, disclosed and consulted in March 2016.

7.1. MITIGATION MEASURES IN PRE-CONSTRUCTION PHASE

7.1.1. Contractor Management

PC Roads FBH will ensure that the construction intervention is carried out without risk to the health and safety of all workers and local community through contract clauses. Therefore, the Contractor will plan, coordinate, control and monitor the undertaken activities to effectively minimize the risks presented during their work.

The ESMP is forming part of the tendering documents and the Contract for Execution of Works. It is the Contractor's obligation to include the implementation of environmental and social mitigation measures into the overall cost.

The Contractor will be required to provide a short statement that confirms that:

- The ESMP conditions have been estimated and included into the bid price,
- The Contractor for Execution of Works has a qualified and experienced person on the Contractor's team who will be responsible for the environmental and social compliance requirements of the ESMP.
- The Contractor will comply with applicable BH and FBH laws, EU standards and WB requirements, including the relevant Operational Policies, this ESMP, framework ESMF and the Environment, Health and Safety guidelines, where applicable.

The following contractual conditions shall apply to the Contractors for Execution of Works employed by PC Roads FBH:

- The Contractor will be required to prepare site-specific CSOP in accordance with the requirements of this ESMP. All submitted CSOPs should be formally reviewed by PC Roads FBH prior to agreement and signing.

- The Contractor will provide formal written reports to PC Roads FBH in accordance with requirements set-out in the ESMP which is part of this document;
- PC Roads FBH is responsible to introduce all contractors and sub-contractors and personnel working on the Project on the contents and provisions of this ESMP and any penalties arising from non-compliance therewith;
- The Contractor is responsible for notifying PC Roads FBH immediately upon receiving any complaints or grievances, as well as immediately upon identifying and implementing any of any corrective actions. The Contractor shall inform the complainant of the Grievance redress mechanism. All grievances will be registered with the Central Feedback Desk (CFD) and logged in the Central Grievance Log. . Contractor will fill out the grievance registration template provided in Appendix 2 of this ESMP on a regular basis and will make it a part of the monthly reports to the contractor
- The Contractor shall provide monthly reports on its management and monitoring of the working conditions of direct and indirect employees on the work site and ensure that systems are in place to monitor compliance with labor and health and safety standards.

The contractor shall:

- Ensure that all workers are required to comply with all national/federal legislation on labor and health and safety, as well as any other relevant standards, including the World Bank Group EHS guidelines; and be held responsible if compliance is not met;
- Be responsible for all activities undertaken by his subcontractors;
- Maintain regular effective two-way communication with all workers, sharing information and assisting in dealing with any unforeseen problems promptly.
- Exchange information and request any plans from sub-contractors, which deals with significant health and safety hazards and risks created by or associated with their work activities.

The recommendations and proposed mitigation measures will be attached to the tendering documentation and subsequently the contract with the Contractor. The ESMP is a part of the work program and as such, it needs to be addressed to the Contractor and carried out as required.

During the construction phase, Contractors will be required to allocate the responsibility of overseeing day-to-day compliance with the SS ESMP to a senior member of staff. Contractors will be responsible for the implementation of all measures included in the SS ESMP for all activities undertaken in terms of the construction contract (including work undertaken by subcontractors). Compliance of Contractors with these measures will be assessed by the Construction Supervisor appointed by the PC Roads FBH, in line with the

Decree on Construction Site Organization, Mandatory Documentation on Construction Site and Construction Work Participants.

7.1.2. Land acquisition and Involuntary Resettlement

The project roundabout is a part of the integrated Resettlement Action Plan (RAP) for 9 sub-projects which was publicly consulted and disclosed in March 2016. As described in the integrated RAP, small parts of 10 private and 12 public land plots will be expropriated.

All land acquisition and expropriation will be conducted in compliance with the applicable legislation in FBiH (in particular, the Law on Expropriation of FBiH), the requirements set by WB OP 4.12 on Involuntary Resettlement and the integrated RAP.

All owners, occupants and users of affected properties at the time of the cut-off date, whether with or without fully recognized ownership rights, are eligible for certain type of compensation or assistance as outlined in the Entitlements Matrix in the Integrated RAP.

Compensation will always be effected prior to land entry or taking of possession over property by the expropriation beneficiary. The land cannot be taken physically (i.e. any civil works or construction cannot start) before compensation has been paid to the affected persons.

All affected persons will be informed, meaningfully consulted and encouraged to participate throughout the land acquisition process, in accordance with the information disclosure and consultation requirements set out in the integrated RAP.

In addition, an effective grievance mechanism is in place for receiving and addressing in a timely fashion specific concerns about compensation and relocation raised by displaced persons, in the manner described in more detail in Chapter 10.2.1 of this ESMP (Grievance Mechanism).

7.2. MITIGATION MEASURES DURING CONSTRUCTION PHASE

7.2.1. Environmental Management

During the construction phase, the Contractor shall award the responsibility of supervising everyday compliance with ESMP to a senior engineer.

The Contractor will be responsible for the implementation of all measures included in the ESMP for all activities undertaken in terms of the construction contract (including work undertaken by sub-contractors).

Compliance of Contractor with provision of ESMP will be assessed by the Construction Supervisor appointed by PC Roads FBH, in accordance with the Ordinance on Construction Site Development, Obligatory Documents on Construction Site and Participants in Construction Work (Official Gazette of the FBH, No. 48/09, 75/09 and 93/12).

Compliance reviews will be submitted by Contractor to PC Roads FBH on a monthly basis. Non-conformances, incidents and deviations from the ESMP will be communicated to PC Roads FBH, or the Supervisor, as soon as possible, within 24 hours from the time of occurrence, where PC Roads FBH shall react to the occurrence a.s.a.p. and impose corrective measures with a deadline for undertaking them.

All mitigation measures are specified in the Table 5. Environmental and Social Impacts Management Plan.

7.2.2. Health and Safety

Works on the reconstruction may pose health and safety risks for construction workers and visitors to the construction site. Population near the construction site and construction workers, as well as road users will be exposed to the risk of: biophysical health risk factors, (e.g. noise, dust, chemicals, construction material, solid waste, waste water, vector transmitted diseases etc.), and (ii) road accidents from construction traffic.

Therefore, the Contractor is obliged to:

- Ensure that only properly trained/licensed people operate heavy machinery;
- Implement suitable safety standards for all workers and site visitors, which should not be less than those laid down in the international standards in addition to complying with the national standards of the FBH⁹,
- Make sure basic safety features for visitors are in place, such as construction warning signs for protecting unsafe areas from being accessed or the obligation for every visitor to wear a helmet before entering the construction site
- Provide the workers with a safe and healthy work environment, taking into account inherent risks in its particular road rehabilitation activity and specific classes of hazards in the work areas,
- Provide personal protective equipment (PPE) for workers, such as safety boots, helmets, masks, gloves, protective clothing, goggles, full-face eye shields, and ear

⁹- *Occupational Safety and Health Convention, 1981 (No. 155)*

- *Promotional Framework for Occupational Safety and Health Convention, 2006 (No. 187)*

- *The Safety and Health at Work Directive 89/391/EEC*

- *World Bank Occupational Health and Safety Guidelines (April 30, 2007.)*

- *and other Recommendations and EU directives*

protection. Maintain the PPE properly by cleaning dirty equipment and by replacing damaged equipment with new one.

- Safety procedures include provision of information, training and protective clothing to workers involved in hazardous operations and proper performance of their job.
- Appoint an environment, health and safety manager to look after the health and safety of the workers.

7.2.2.1. Safety Engagements

The Contract should ensure that all possible risks in the course of work are eliminated or reduced to a minimum. In order to prevent the possibility of higher-scale accidents it is necessary to plan and develop the measures to help reduce the adverse impacts. The Contractor's duty is to create a Management Plan in Case of Accidents (MPCA).

The MPCA should include organizational structure, responsibilities, procedures, communication, training, resources and other measures needed to provide appropriate reaction of the Contractor in case of accidents which might occur during the project. The most important items of the MPCA are as follows:

- Identify potential hazards and large-scale accidents,
- General procedures for all emergencies and accidents that might occur during the project due to natural disasters, defects on equipment of human errors,
- Description of preventive measures against accidents,
- Workers training for their roles and responsibilities when accident occurs,
- Determining responsible person at the spot,
- Urgent communication procedures,
- Information and contacts of important local authorities and emergency services,
- Internal and external alarming,
- Response plans for specific types of hazards, for example medical assistance, fire etc.

The MPCA should include:

- Spill Response Plan,
- Emergency Preparedness,
- Response Plan to Accidents.

The contractor is also obliged to:

- The contractor should provide portable toilets at the construction sites, if about 25 people are working the whole day for a month. Location of portable facilities should be at least 6 m away from storm drain system and surface waters. These portable toilets should be cleaned once a day and all the sewerage should be pumped from the collection tank once a day and should be brought to the common septic tank for further treatment.
- Contractor should provide bottled drinking water facilities to the construction workers at all the construction sites.

The Contractor is obliged to secure the construction site in accordance with the Regulations on Occupational Safety and to provide adequate equipment

In case compliance is not met the contractor will be held responsible in accordance with Labor Protection Law.

7.2.2.2. First Aid

The Contractor shall:

- Ensure that facilities that provide health care and first aid are easily accessible. Appropriately equipped first aid stations are to be easily accessible in the whole work area;
- Documenting and reporting accidents, diseases and incidents on workplace;
- Prevent accidents, injuries and diseases originating from, in connection with or arising in the course of work, reducing as much as possible the possible cause of danger in the way which is in accordance with good international practice of;
- Identify potential dangers for works, particularly those that might pose threat to life, and provide the necessary preventive and protective measures;
- Ensure that construction site drivers strictly comply with the rules of driving;
- Ensure appropriate lighting in city urban area and alongside roads.

7.2.3. Traffic and Road safety

The Contractor shall ensure traffic and road safety during performance of works.

The Contractor shall develop the CSOP which includes preparation and organization of construction site during and after construction, including roads on the construction site i.e. Traffic Management Plan (TMP).

Traffic on construction site is to be regulated the same way as public traffic roads.

The Contractor is obliged to:

- Prepare and deliver TMP to PC Roads FBH for its approval, no later than 30 days upon the beginning of works on any component of the project included in traffic redirection and management.
- For the purpose of uninterrupted traffic movement during the reconstruction of the crossroad, include in TMP the following parts: detailed drawings of traffic solutions by showing all bypasses, temporary roads, temporary turns, necessary barricades, signalization/lighting, traffic signs etc.
- Ensure signs in strategic parts of traffic roads.
- Install and maintain a sign on each important crossroad, on roads which will be used during reconstruction works, which will clearly indicate the following data in a local language:
 - Location: station label and settlement name
 - Duration of construction
 - Period of the proposed bypass/alternative road
 - Name and contact address/telephone number of responsible personnel
 - Name and contact address/telephone number of contractor
 - Sincere apology for the caused inconvenience

According to the Law on Roads FBH, article 77. For every construction on public road, for works on regular maintenance or any other works under traffic, appropriate temporary signage has to be set up. Respectively traffic has to be regulated in a way that will guarantee safety of traffic and contractor with minimum traffic flow disruptions.

The appropriate signage will be determined based on the Regulations on Traffic Signs (Regulations on Traffic Signs and Signage on Roads, Ways of Marking Works and Obstacles on Roads and Signs that an Authorized Person Can Give to Participants in Traffic ("Official Gazette of BiH", No. 16/07)) and in line with the Guidelines for Design, Construction, Maintenance and Control on Roads (Sarajevo/Banja Luka 2005).

TMP should include details about the following:

- Construction plan by phases,
- Beginning and duration of works,
- Overview of the existing conditions near the construction site,
- Identification of affected areas,

- Mitigation measures,
- Plan of public transport, for example, timetable, change of timetable, disturbance and the like;
- Circulation plans, including zones of entry and exit, routes for towing of material, turnaround points, parking areas, zones of interlocking with other traffic roads etc.,
- Routes for pedestrians and vehicles,
- Traffic controls for each expected intervention, including illustrations of barriers, paths, signalization plan, warning signs etc.,
- Requirements for special vehicles, for example, those of large dimensions,
- Construction works paths (access, ramps, loading, unloading),
- Connection roads for supply vehicles and storage of material,
- Expected interaction of pedestrians and vehicles,
- Roles and responsibilities of persons on construction site regarding traffic management,
- Instructions on the procedures regarding traffic control, including urgent situations.

TMP should also include appropriate communication with affected population about traffic and timely information of traffic changes/road blockage.


TMP should be monitored on a regular basis (responsibility of the supervision engineer) and audited to ensure effective implementation and to take into consideration any changes on construction site. All workers on construction site should be acquainted with the TMP.

Road safety measures envisaged during construction include vertical and horizontal signage based on Regulations on Traffic Signs (Regulations on Traffic Signs and Signage on Roads, Ways of Marking Works and Obstacles on Roads and Signs that an Authorized Person Can Give to Participants in Traffic ("Official Gazette of BiH", No. 16/07)) as shown in figure 8.

Organization of traffic flow will have three phases as depicted in figure 7:


1. While the first part of the roundabout is being constructed traffic will flow on the other half in a one way regime
2. While the second half of the roundabout is being constructed, traffic will flow on the constructed half in a one way regime
3. Once the roundabout is formed traffic will flow regularly

Figure 13: Scheme of traffic flow during construction

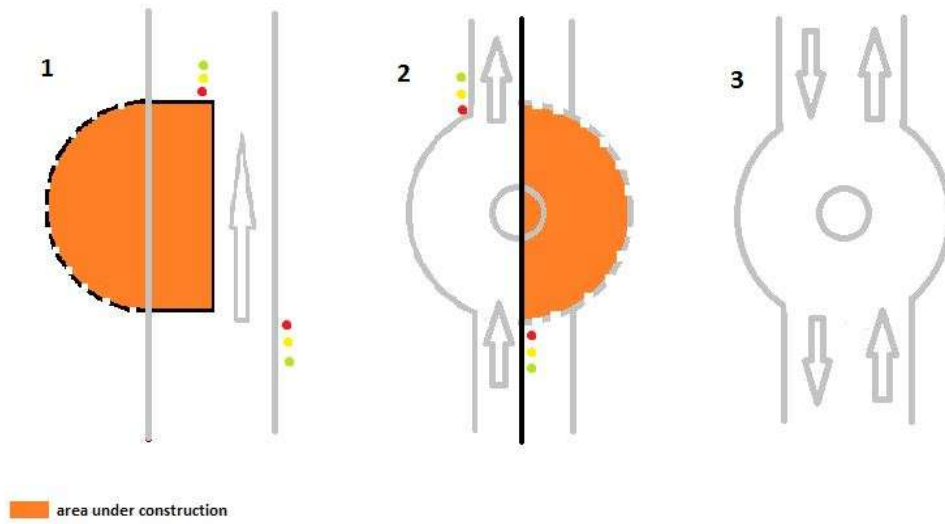

Source: PC Roads

Figure 14: Scheme of traffic signage that will be used during construction period

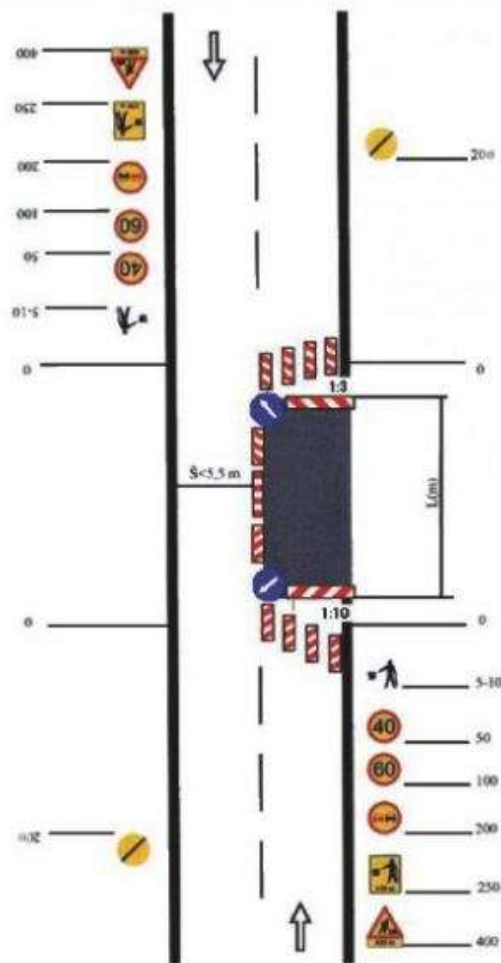

Source: PC Roads

7.2.4. Construction Site Safety

The Contractor shall secure the construction site. The construction site should be accompanied with a board with information on works and participants in construction (investor's name, contractor's name, project designer's name, name and type of construction being built, beginning and end of works). These measures are necessary so the Contractor could ensure safety of construction site and prohibit entry ensure of unauthorized persons.

The Elaborate on safety on work and Elaborate on protection from fires and explosions should include detailed measures of safety on construction site in order to ensure safety of location and remove possible risks and adverse impacts on employees and unauthorized persons.

7.2.5. Land Acquisition, Involuntary Resettlement and Economic Displacement

At this moment, it is not expected that any private land will have to be occupied during construction for lodging machines and disposal of materials. Land owned by the investor alongside the road will be used for such purpose. However, if temporary occupation of private land is needed during construction, this will be agreed upon with respective owners and the compensation will be paid in accordance with provisions determined in the integrated RAP and RPF before the land is accessed. The contractor is responsible for keeping the works within the right of way.

At this moment no access loss is expected. Nevertheless, access might get difficult during the construction phase due to traffic congestions and civil works. Thus, citizens have to be provided with timely information about upcoming construction works, expected duration of the works, alternative routes, etc. via an information leaflet on the construction site, via local newspapers, the municipality's notice board and website and via PC Roads' website as soon as the contract is signed. Furthermore, safe and continuous access to all adjacent business facilities, shops and residences during construction has to be ensured. If access restriction cannot be avoided the owner will be timely notified. The duration of the restriction will be agreed upon with respective owners. All applicable compensations will be paid according to the provisions determined in the Integrated RAP and RPF.

7.3. MITIGATION MEASURES IN OPERATIONAL PHASE

It is required from PC Roads FBH to undertake the instructions given in the *Table 5. Environmental and Social Impacts Management Plan* in operational phase.

7.4. SUMMARY OF MITIGATION MEASURES

- Table 5: Environmental and Social Impacts Management Plan

Impact/Problem	Mitigation Measures	Cost Assessment (US\$)		Institutional Responsibility		Comments
		Operative	Implementation	Operative	Implementation	
PRE-CONSTRUCTION PHASE						
▪ Restricted access.	▪ Development of the TMP.	Included in the bid	Internal resources	Contractor	PC Roads FBH	
▪ Impacts on living conditions.	<ul style="list-style-type: none"> ▪ Informing the local communities on the extent of works and duration prior to the commencement of construction works via local newspapers, the municipality's notice board and website and via PC Roads' website as soon as the contract is signed. ▪ informing road users via the construction site information board, and an information leaflet at the construction site 	Internal resources	Internal resources	PC Roads FBH	PC Roads FBH	Road users are orderly informed about construction works on roads via radio news and auto-moto club's press releases
▪ Expropriation, involuntary resettlement and economic displacement	<ul style="list-style-type: none"> -All land acquisition and expropriation will be conducted in compliance with the applicable legislation in FBiH and the Integrated RAP - Compensation will always be paid out prior to land entry or taking of possession over property by the expropriation beneficiary. - . Cash compensation will be provided at replacement cost according to the entitlement 	Internal resources	Internal resources	PC Roads FBH + Municipality of Tuzla		

Impact/Problem	Mitigation Measures	Cost Assessment (US\$)		Institutional Responsibility		Comments
		Operative	Implementation	Operative	Implementation	
	<p>matrix in the integrated RAP</p> <p>-All affected persons will be informed, meaningfully consulted and encouraged to participate throughout the land acquisition process, in accordance with the information disclosure and consultation requirements set out in the integrated RAP.</p> <ul style="list-style-type: none"> Assuring an effective grievance mechanism for receiving and addressing in a timely fashion specific concerns about compensation and relocation raised by displaced persons, in the manner described in more detail in Chapter 10.2.1 of this ESMP (Grievance Mechanism). 					
<ul style="list-style-type: none"> Compliance with national legislation. 	<ul style="list-style-type: none"> Obtaining all necessary permits for Project implementation. 	Internal resources	Internal resources	PC Roads FBH + Project designer	Competent body for issuing the permit	Prevention of negative impacts
<ul style="list-style-type: none"> Restrictions on land use and damages on private property and businesses. 	<ul style="list-style-type: none"> Avoid private properties where possible; The Contractor will organization the construction site in collaboration and agreement with the municipality of Tuzla; In case occasional land occupation cannot be avoided, compensation will be provided to affected owners/users (application of RPF and RAP), as well as compensation for loss of the possibility to 	Internal resources	Internal resources	Contractor + PC Roads FBH	PC Roads FBH	If occasional land use cannot be avoided, it will be agreed upon with respective owner and compensation will be paid before the land is

Impact/Problem	Mitigation Measures	Cost Assessment (US\$)		Institutional Responsibility		Comments
		Operative	Implementation	Operative	Implementation	
	continue to use land and businesses as intended.					accessed
▪ Job creation and impacts on local business.	<ul style="list-style-type: none"> ▪ Informing the public in advance about the construction works, in order to enable businesses and workforce in the area to prepare for the demand on the market via local newspapers, the municipality's notice board and website and via PC Roads' website as soon as the contract is signed. ▪ Informing business owners in advance about the construction works, in order to be able to plan the necessary road use accordingly (via local newspapers, the municipality's notice board and website and via PC Roads' website as soon as the contract is signed) 	Internal resources	Internal resources	PC Roads FBH	Contractor + PC Roads FBH	.
CONSTRUCTION PHASE						
▪ Access restriction.	<ul style="list-style-type: none"> ▪ Implementation of the provisions on providing timely information to citizens about upcoming construction works, expected duration of the works, alternative routes, etc. via an information leaflet on the construction site, via local newspapers, the municipality's notice board and website and via PC Roads' website as soon as the contract is signed.; 	Included in construction works	Included in supervision	Contractor	Supervisory body*	Supervisory body is appointed by investor PC Roads FBH

* Supervisory body shall be a Consultant appointed by PC Roads FBH according to Federal legislative

Impact/Problem	Mitigation Measures	Cost Assessment (US\$)		Institutional Responsibility		Comments
		Operative	Implementation	Operative	Implementation	
	<ul style="list-style-type: none"> ▪ Ensuring safe and continuous access to all adjacent business facilities, shops and residences during construction; ▪ If access restriction cannot be avoided the owner will be timely notified. The duration of the restriction will be agreed upon with respective owners. All applicable compensations will be paid according to the provisions determined in the Integrated RAP and RPF ▪ Implementation of TMP. 					
<ul style="list-style-type: none"> ▪ Impacts on living conditions of local community; 	<ul style="list-style-type: none"> ▪ Providing timely information to the citizens on any type of disruption and inconvenience via local newspapers, the municipality's notice board and website and via PC Roads' website as soon as the contract is signed.; ▪ Implementation of TMP; ▪ Implementation of CSOP; ▪ Implementation of ESMP provisions. 	Included in construction works	Included in supervision	PC Roads FBH (providing informations to the citizens)+ Contractor (implementation of the TMOP, CSOP, ESMP)	Supervisory body*	
<ul style="list-style-type: none"> ▪ Impacts on local traffic: ▪ increase of local traffic, including heavy machinery and trucks; 	<ul style="list-style-type: none"> ▪ Implementation of TMP; ▪ Introduction of appropriate signalization and warning signs; ▪ Adjustment of working hours to local traffic 	Included in construction works	Included in supervision	Contractor	Supervisory body*	

Impact/Problem	Mitigation Measures	Cost Assessment (US\$)		Institutional Responsibility		Comments
		Operative	Implementation	Operative	Implementation	
<ul style="list-style-type: none"> ▪ closing one of the traffic lanes for construction purposes causing traffic delays and limited access. 	<ul style="list-style-type: none"> patterns, e.g. avoiding major transport activities during rush hours; ▪ Traffic management system and staff training, especially for site access and near-site heavy traffic; ▪ Provision of safe passages and crossings for pedestrians where traffic interferes. 					
<ul style="list-style-type: none"> ▪ Temporary occupation of privately or publicly owned land plots in case of unforeseen events 	<ul style="list-style-type: none"> ▪ Avoidance of temporary occupation of privately owned plots; ▪ In case avoidance is not possible, minimize size of the area used and impacts on the vegetation and implementation of RPF and RAP provisions on temporary occupation. 	Internal resources	Internal resources	PC Roads FBH	Contractor	
<ul style="list-style-type: none"> ▪ Air emissions: - exhaust gasses; - dust generation. 	<ul style="list-style-type: none"> ▪ High quality fossil fuels (with low percentage of sulphur and lead) need to be used for construction machinery and equipment; ▪ All machines and vehicles to be used in construction/ reconstruction/ rehabilitation activities must have use permit; ▪ Vehicles need to be regularly maintained ; ▪ Equipment with installed filters to reduce soot emission needs to be used; ▪ When not in use the equipment and machinery 	Included in construction works	Included in supervision	Contractor	Supervisory body*	

Impact/Problem	Mitigation Measures	Cost Assessment (US\$)		Institutional Responsibility		Comments
		Operative	Implementation	Operative	Implementation	
	need to be shut down; ▪ Maximum speed of the vehicle on unpaved roads should be restricted to 20 km/h; ▪ Moistening/ wetting the site to prevent dust occurrence (in areas with dry soils or where activities generate dust); ▪ Sand and gravel materials need to be transported in covered trucks.					
▪ Increased level of noise and vibration: - noise emission and noise disturbance; - vibration.	▪ Restriction of works to period of day only (period of day: 06:00 to 22:00, period of night: 22:00-06:00) ▪ In the case of noise complaints by local residents, simultaneous use of machines that generate noise over 70 dB needs to be limited; ▪ In the case of noise complaints by local residents, number of trucks per day visiting the site needs to be reduced; ▪ All machines and vehicles to be used in construction/ reconstruction/ rehabilitation activities must have use permit; ▪ When not in use the equipment and machinery need to be shut down; ▪ Maximum speed of the vehicle on unpaved roads	Included in construction works	Included in supervision	Contractor	Supervisory body*	

* Supervisor shall be a Consultant appointed by PC Roads FBH according to Federal legislative

Impact/Problem	Mitigation Measures	Cost Assessment (US\$)		Institutional Responsibility		Comments
		Operative	Implementation	Operative	Implementation	
	should be restricted to 20 km/h.					
<ul style="list-style-type: none"> ▪ Soil degradation and emissions to soil: - soil contamination by oils, fuels and other hazardous substances. 	<ul style="list-style-type: none"> ▪ Proper waste disposal; separation of hazardous waste; engagement of authorized companies for final waste disposal ; track of the final disposal sites especially for removed asphalt; note/record of the waste amounts; ▪ Oil and fuel collection systems to be fitted to prevent leakage 	Included in construction works	Included in supervision	Contractor	Supervisory body*	
<ul style="list-style-type: none"> ▪ Degradation of biological and ecological resources by oil, fuel and chemical spillages 	<ul style="list-style-type: none"> ▪ Prevent and control oil, fuel, and chemical spillages that can find their way to the soil and groundwater 	Included in construction works	Included in supervision	Contractor	Supervisory body*	
<ul style="list-style-type: none"> ▪ Decrease in the aesthetic value of the landscape due to construction site organization. 	<ul style="list-style-type: none"> ▪ The land determined for use by the Project can only be used for the construction activities and no other land is available for i.e. storage of building material, parking of the heavy machinery etc. in terms of soil disruption; 	Included in construction works	Included in supervision	Contractor	Supervisory body*	
<ul style="list-style-type: none"> ▪ Inadequate traffic management during construction: - traffic congestion and obstructions on road sections; 	<ul style="list-style-type: none"> ▪ Implementation of EMP which includes the: <ul style="list-style-type: none"> - Design and implementation of the TMP, - Placement of adequate traffic signalization. 	Included in construction works	Included in supervision	Contractor	Supervisory body*	

Impact/Problem	Mitigation Measures	Cost Assessment (US\$)		Institutional Responsibility		Comments
		Operative	Implementation	Operative	Implementation	
<ul style="list-style-type: none"> ▪ Inadequate waste handling. 	<ul style="list-style-type: none"> ▪ Implementation of WMP that shall ensure environmentally sound collection of waste, its storage, transport and final disposal, or and primarily reuse / recycling. ▪ No clandestine waste disposal will be allowed on site, including open burning of wastes. ▪ The waste should be stored for a short period of time and should be removed as soon as possible. ▪ The waste should be primarily recycled or reused where possible and then finally disposed ▪ No open burning of wastes is allowed on site ▪ All Waste that cannot be reused should be handed over to a licensed company or agent (amounts are to be recorded as well as types of handling actions). ▪ Disposal sites of construction material are will be determined by the municipality and should be handled in the most appropriate environmental manner. 	Included in construction works	Included in supervision	Contractor	Supervisory body*	
<ul style="list-style-type: none"> ▪ Inadequate organization of construction site. 	<ul style="list-style-type: none"> ▪ Implementation of CSOP 	Included in construction works	Included in supervision	Contractor	Supervisory body*	

* Supervisory body shall be a Consultant appointed by PC Roads FBH according to Federal legislative

* Supervisory body shall be a Consultant appointed by PC Roads FBH according to Federal legislative

Impact/Problem	Mitigation Measures	Cost Assessment (US\$)		Institutional Responsibility		Comments
		Operative	Implementation	Operative	Implementation	
<ul style="list-style-type: none"> ▪ Inadequate workers safety. 	<ul style="list-style-type: none"> ▪ Implementation of work safety measures: <ul style="list-style-type: none"> - Provide workers with a safe and healthy work environment, - Provide personal protective equipment, - Respect safety procedures, - Provide portable toilets, - Provide drinking water 	Included in construction works	Included in supervision	Contractor	Supervisory body*	
<ul style="list-style-type: none"> ▪ Accidental situations i.e. spills, leakage of oils, fats, fuels and similar hazardous materials. 	<ul style="list-style-type: none"> ▪ Implementation of MPCA which includes: <ul style="list-style-type: none"> - Spill Response Plan, - Emergency Preparedness and Response Plan. ▪ Implementation of Elaborate on protection from fires and explosions ▪ Implementation of Labor Protection Law 	Included in construction works	Included in supervision	Contractor	Supervisory body*	
<ul style="list-style-type: none"> ▪ Materials supply and transport. 	<ul style="list-style-type: none"> ▪ Implementation of CSOP to ensure materials are transported in covered vehicles to reduce impacts on environment and Management Plan on Safety at Work to ensure materials are used in accordance with Bill of Quantities 	Included in construction works	Included in supervision	Contractor	Supervisory body*	
CHANCE-FIND PROCEDURES DURING CONSTRUCTION PHASE						

Impact/Problem	Mitigation Measures	Cost Assessment (US\$)		Institutional Responsibility		Comments
		Operative	Implementation	Operative	Implementation	
<ul style="list-style-type: none"> Impacts on cultural heritage. 	<ul style="list-style-type: none"> If archeological findings or other chance finds appear on or near construction site immediate work suspension and local authorities notification is required; 	Included in construction works	Included in supervision	Contractor	Supervisory body*	In case of finding cultural heritage, supervision is implemented by the competent institution
OPERATION PHASE						
<ul style="list-style-type: none"> Regular occurrences during road operation 	<ul style="list-style-type: none"> Regular road maintenance 	Incl. in maintenance works	Internal resources	Contractor for maintenance works	PC Roads FBH	
<ul style="list-style-type: none"> Decrease in road safety due to the increase of traffic 	<ul style="list-style-type: none"> Regular maintenance of road safety equipment and signage 	Incl. in maintenance works	Internal resources	Contractor for maintenance works	PC Roads FBH	

* Supervisory body shall be a Consultant appointed by PC Roads FBH according to Federal legislative

8. ENVIRONMENTAL MONITORING PROGRAM

The table below presents monitoring plan necessary for construction site – developed in connection with mitigation measures to avoid or reduce negative impact.

Prior to commencement of works, in accordance with requirements of the ESMP, and a minimum of monitoring requirements, described in table below, without limitation to these requirements, the Contractor shall prepare detailed list of mitigation measures and parameters to be monitored and prepare the site-specific baseline data as foreseen in the monitoring plan below.

The monitoring plan on construction site will be used by Supervision Engineers of PC Roads FBH. These signed lists will be forwarded to PC Roads FBH, who will be responsible for monitoring and reporting about the compliance.

PC Roads FBH will maintain a registry of grievances, which will contain all information on grievances or complaints received by the community or other interested parties. That will include: type of grievance, time and actions for their resolution and outcome.

- Table 6: Environmental and Social Monitoring Program

Potential impact	Which parameter is to be monitored?	Where will the monitoring be performed?	How will the monitoring be performed?	When will the monitoring be performed?	Cost assessment (US\$)		Responsibility	
					Implementation	Operative	Implementation	Operative
PRE-CONSTRUCTION PHASE								
▪ Job creation and impacts on local businesses.	<ul style="list-style-type: none"> ▪ Number of employed persons from local communities; ▪ Timely informing the local communities about the forthcoming works. 	Wider area of construction	Inspection	Prior to construction	Included in performance	Included in performance	Contractor	Contractor
▪ Expropriation, involuntary resettlement and economic displacement	<ul style="list-style-type: none"> ▪ Implementation of RAP provisions 	PC Roads of FBH	Monthly and quarterly internal reports	Prior to construction	/	25000	PC Roads of FBH+ Supervisory body	PC Roads of FBH+ Supervisory body
▪ Temporary occupation of privately owned land plots for the purpose of construction of access roads and placement of staff, machines and material.	<ul style="list-style-type: none"> ▪ Implementation of RPF provisions 	Construction site	Visual inspection and inspection	Prior to construction and during construction when necessary	Included in supervision	Included in supervision	Supervisory body + PC Roads FBH	Supervisory body + PC Roads FBH
CONSTRUCTION PHASE								
▪ Access restrictions.	<ul style="list-style-type: none"> ▪ TMP in place, ▪ Implementation of RPF provisions on compensation procedures for businesses 	Construction site	Visual inspection	Random checks at least once a week during the	Included in supervision	Included in supervision	Supervisory body + PC Roads	Supervisory body + PC Roads

Potential impact	Which parameter is to be monitored?	Where will the monitoring be performed?	How will the monitoring be performed?	When will the monitoring be performed?	Cost assessment (US\$)		Responsibility	
					Implementation	Operative	Implementation	Operative
	affected by access restrictions and livelihood restoration.			construction			FBH	FBH
<ul style="list-style-type: none"> ▪ Restrictions on land use and damage to the private property (agricultural plots, horizontal infrastructure, fences and railings) due to disposal of construction waste, work camps and parks of heavy machinery 	<ul style="list-style-type: none"> ▪ CSOP in place; ▪ Implementation of RPF provisions on compensation procedures in case occasional land use cannot be avoided, compensation will be provided to affected owners/users ▪ grievances 	Construction site	Visual inspection + Central Grievance Log	Prior to construction and random checks at least once a week during the construction	Included in supervision	Included in supervision	Supervisory body + PC Roads FBH	Supervisory body + PC Roads FBH
<ul style="list-style-type: none"> ▪ Impacts on local traffic (increase of local traffic, including heavy machinery and trucks, operation of roads with only one lane causing traffic delays and limited access) 	<ul style="list-style-type: none"> ▪ TMP in place; ▪ Traffic patterns; ▪ Timely information to the citizens. 	On construction site and nearby	Visual inspection and inspection	random checks during the week	Included in supervision	Included in supervision	Supervisory body	Supervisory body
<ul style="list-style-type: none"> ▪ Air emissions: - exhaust gasses; - dust generation 	<ul style="list-style-type: none"> ▪ Level of dust (amount of particles of sediment and floating particles); ▪ Emissions of exhaust gases from vehicles and 	Construction site	Measuring devices	As a baseline and during construction when needed and upon	-	500 USD/measuring	Contractor	Authorized laboratory

Potential impact	Which parameter is to be monitored?	Where will the monitoring be performed?	How will the monitoring be performed?	When will the monitoring be performed?	Cost assessment (US\$)		Responsibility	
					Implementation	Operative	Implementation	Operative
	equipment; ▪ (SO ₂ , NO ₂ , dim and PM ₁₀).			complaints by the citizens				
▪ Increased level of noise and vibration: - noise levels, - vibration.	▪ Level of noise.	In populated places near the construction site	Measuring devices	Upon order by supervisory organ or upon complaints by the citizens	-	500 USD /measuring	Contractor + Supervision	Authorized laboratory
▪ Soil pollution	- Soil quality, including, PH, heavy metals, phosphorus, nitrogen, Na, Ca, salts, PAHs hydrocarbons	On representative plots of land near construction sites	Taking samples and standard laboratory analyses	As a baseline and upon order by supervisory organ or upon complaints by the citizens	-	500 USD /measuring	Contractor + Supervision	Authorized laboratory
▪ Emissions into groundwater and soil due to improper waste handling.	▪ CSOP in place, ▪ Waste generation and management.	Construction site	Visual inspection, disposal records or receipts from landfills	Daily	Included in performance	Included in performance	Contractor + Supervision	Contractor
▪ Degradation of biological and ecological resources	▪ Survey of the site for any endemic or endangered species	In the zone of corridors of direct and indirect impacts	Field recordings and incorporation of the findings in the ESMP	As a baseline	-	-	Contractor	Authorized institution

Potential impact	Which parameter is to be monitored?	Where will the monitoring be performed?	How will the monitoring be performed?	When will the monitoring be performed?	Cost assessment (US\$)		Responsibility	
					Implementation	Operative	Implementation	Operative
▪ Waste management.	▪ Implementation of CSOP and WMP.	Construction site	Visual inspection, disposal records or receipts from landfills	Regularly during construction. Amount and disposal records internal reports will be made daily and monthly	Included in performance	Included in performance	Contractor + Supervision	Contractor
▪ Accidental situations i.e. spills, leakage.	- Implementation of MPCA which includes: - Spill Response Plan, - Emergency Preparedness and - Response Plan.	Construction site	Visual inspection	Daily	Included in performance	Included in performance	Contractor + Supervision	Contractor
▪ Materials supply.	▪ Implementation of CSOP (the origin of material, material approvals etc.).	Construction site	Reports	Daily	Included in performance	Included in performance	Contractor + Supervision	Contractor
▪ Material transport.	▪ Implementation of CSOP (the origin of material, licenses	Construction site	Visual inspection	Daily	Included in performance	Included in performance	Contractor +	Contractor

Potential impact	Which parameter is to be monitored?	Where will the monitoring be performed?	How will the monitoring be performed?	When will the monitoring be performed?	Cost assessment (US\$)		Responsibility	
					Implementation	Operative	Implementation	Operative
	etc.).						Supervision	
▪ Workers safety.	▪ Implementation of work safety measures (protection equipment, toilets, drinkable water etc.).	Construction site	Visual inspection	Daily	Included in performance	Included in performance	Contractor + Supervision	Contractor

9. IMPLEMENTATION AND REPORTING

9.1. PROJECT IMPLEMENTATION

PC Roads FBH is the implementer of the Project and shall be responsible for the implementation and compliance of the Project in line with the ESMP.

The public has the right to participate directly or indirectly, with a possibility to state their interests and opinion in decision-making process during all project activities.

The application of all identified environmental and social mitigation measures and the environmental monitoring program will be ensured. The Contractor will be responsible for the implementation of the environmental mitigation measures during construction and will employ environmental experts to supervise the implementation of Contractor's responsibilities and will be in communication with the investor and with the FMoET. PC Roads FBH will constitute a Grievances Committee which will receive all grievances during Project implementation in accordance with grievance mechanisms as prescribed in the ESMF. During project implementation, PC Roads FBH will supervise compliance of the Contractor with provisions and ESMP.

Upon project completion, PC Roads FBH will be in charge of structures' management and maintenance. Regular and timely payment will be carried out in accordance with monitoring plan.

9.2. REPORTING PROCESS

9.2.1. Contractor to PC Roads FBH

The Contractor shall prepare a Report on compliance with ESMP in form of a monthly progress report and submit it to PC Roads FBH in a local language (C/S/B and in English, in analogue and digital form).

In case of any accidental situations or jeopardizing the environment and society the reporting must be immediate. The Contractor is obliged to inform the PC Roads FBH and local community immediately after any accidental situations that happened over the phone +387 33 250 370 or via email form at the PC Roads FBH website: <http://jpcfbih.ba/index.php/bs/kontakt> .

The Contractor's reports to PC Roads FBH are to include a list and description of the performed activities, as well as recommendations and planned future activities and protection measures.

9.2.2. Supervision Engineer to PC Roads FBH

The Supervision Engineer shall prepare a Report on compliance with ESMP in form of a monthly progress report and submit it to PC Roads FBH in a local language (C/S/B and in English, in analogue and digital form).

9.2.3. PC Roads FBH to WB

PC Roads FBH shall prepare Annual Environmental Health and Safety Reports (AEHS), including monitoring indicators and reports on the implementation of their requirements set in ESPM and submit them to the World Bank for review.

In case of higher-scale accidents or deaths on construction site, PC Roads FBH shall promptly notify the World Bank thereof.

10. PUBLIC DISCUSSION AND INFORMATION DISCLOSURE

10.1. PUBLIC CONSULTATION

Public consultation of the subject ESMP was organized in Tuzla after the WB approved the draft of the ESMP.

The document was published and available to the public in a local language on the website of PC Roads FBH on 05.04.2018. and on the website of Tuzla City on 16.04.2018. Public consultations were announced on the website PC Roads FBH on 05.04.2018. and on the website of Tuzla City on 16.04.2018. and on 10.04.2018. in local newspapers (Dnevni Avaz). The public consultations were held on 25.04.2018. in Tuzla, and the Minutes of the Public Discussion on ESMP is an Appendix 3 of this document. Public consultations were attended by 17 interested parties.

The record on public discussion, that is, grievances presented at the public discussion shall be recorded in the Grievance Register, and opinions and suggestions of the public shall be integrated into the final ESMP.

After public discussion the documents is disclosed again on the website of PC Roads of FBH.

10.2. INFORMATION DISCLOSURE

ESMP draft was available on the website of PC Roads of the (www.jpafbih.ba) in a local language and on the website of the WB in English. During the process of public consultation the interested public got all information regarding the project, including anticipated social and environmental impacts. The findings of the assessment will be presented in a simple way.

During construction period, the Contractors will submit monthly information to PC Roads FBH regarding process of work, which will be published on the websites of PC Roads FBH and BIHAMK (Car Association of BH) regarding temporary traffic regulation.

Schedule of works and potential changes to the schedule will also be announced two weeks prior to the beginning of works on the website of PC Roads FBH and in local newspapers, radio and television stations for disclosure. The schedules will provide information on the beginning and end of works, which can impact the affected groups (such as changes to traffic/water/regime of electric energy supply and access, noise and dust due to construction works).

10.2.1. Grievance Mechanisms

Besides the institutionally available ordinary and extraordinary legal remedy, and existing institutional channels, PC roads FBH will ensure and form a special Grievance Redress

Mechanism in collaboration and direct involvement of those municipalities under whose administrative authority the project is carried out, in this case with the Tuzla municipality.

Grievance redress mechanism designed for this project is the **Central Feedback Desk (CFD)** at the level of the implementing agency PC Roads FBH which shall serve as both project level information center and grievance mechanism, available to those affected by implementation of all project sub-components. The CFD shall serve the persons affected directly or indirectly by construction works.

The Grievance Registration Sheet (Appendix 1) as print out shall be available at municipal administration, at the construction site and in the offices of PC Roads FBH and shall be available for download on the website of PC Roads of FBH (www.jpafbih.ba) and the municipality's website.

The grievance can be logged in writing with the Contractor, at the construction site as well as in the contractor's offices. The contractor is obliged to hand out the Grievance Registration Sheet, explain the grievance mechanism to the concerned citizen and forward the filled in Grievance Form to the central Feedback Desk in PC Roads FBH. The grievance can also be filled in within PC Roads FBH, by phone, by fax, and by e-mailing it to the designated e-mail address zalbena@jpafbih.ba, or by mail to the address Terezija 54, 71000 Sarajevo.

An information leaflet concerning the grievance mechanism will be available at the construction site at all times, weather the construction site is closed or open. The information leaflet will be plasticized and hung on the construction site information board to be available to road users at all times.

All grievances will be archived in the register and assigned a number, and acknowledged within 3 working days.

The CFD will make all reasonable efforts to address the complaint upon the acknowledgement of grievance. If the CFD is not able to address the issues raised by immediate corrective action, a long-term corrective action will be identified. The complainant will be informed about the proposed corrective action and follow-up of corrective action within 14 working days upon the acknowledgement of grievance.

If the particular issue raised through the Grievance Mechanism cannot be addressed or if action is not required, a detailed explanation/ justification will be provided to the complainant on why the issue was not addressed. The response will also contain an explanation on how the person/ organization that raised the complaint can proceed with the grievance in case the outcome is not satisfactory.

At all times, complainants may seek other legal remedies in accordance with the legal framework of FBH.

11. Requirements for start of works

The Contractor shall establish all required baseline data before the commencement of works. The Baseline – Monitoring data shall include air quality data, soil quality data, survey of the site for any endangered and endemic species and other environmental issues in zone of corridors of direct and indirect impacts. The Contractor is also obliged to ensure these measurements during and after completion of the construction works. . The Contractor will ensure that the measurements are conducted by authorized agencies and that they are based on the findings and recommendations of a qualified expert.

The Contractor shall develop:

- 1.) A Construction Site Organization Plan (CSOP) that is made up of:
 - a. Implementation Plan of this ESMP,
 - b. a detailed Waste Management Plan (WMP)]
 - c. Study on Safety (includes Elaborate on Safety at Work and Elaborate on Protection From Fire and Explosions),
 - d. Traffic Management Plan (TMP) must be developed, which will be created by the Contractor prior to the beginning of construction works.

These studies are to be developed in accordance with federal acts¹⁰, before starting the execution of works, while the Contractor's legal obligations defined in the Bidding Documents and Contract shall be based on the a provisions of this ESMP . The Contractor shall submit these studies to the PC Roads FBH supervisory engineer, Environmental and Social Specialists, before beginning of works, and the company has to accept and approve them prior to start of works.

Due to the time constraints related to the issuance of the bidding documents, the public consultations are to be held prior to the start of works but once the bidding documents have been issued; therefore the EMP included in the bidding documents may need to be subsequently updated after the consultations. The contractor will be obliged to follow the updated ESMP.

11.1. Social aspects

-Implementation of the integrated RAP

- Payment of the compensation in accordance with RAP provisions before the land is accessed

¹⁰ Provision on arrangements of construction site, mandatory documentation at the construction site and participants in construction, Official Gazette of FBH 48/09, 75/09 and 63/12

APPENDICES

APPENDIX 1. GRIEVANCE FORM

	REFERENCE NUMBER (Filled by the office)	
CATEGORY OF COMPLAINTS	A) Affected by expropriation	
	b) All others	
PARTICIPANT INFORMATION OF GRIEVANCE		
FULL NAME		
YEAR OF BIRTH		
GENDER	M	F
ADDRESS		
TELEPHONE/MOBILE NUMBER		
E-MAIL		
Description of Incident for Grievance (What happened? Where did it happen? Whom did it happen to? What is the result of the problem?)		
Date of the Incident?		
<ul style="list-style-type: none"> • One-time incident/grievance – Date: _____ • Happened more than once (How many times?) _____ • On-going (currently experiencing problem) 		
What would you like to see happen?		
DATE:	SIGNATURE:	
RETURN THIS FORM TO: CENTRAL FEEDBACK DESK		
PC ROADS OF THE FBH Terezija 54, 71000 Sarajevo Note: All copies are returned to PIU		

APPENDIX 2. GRIEVANCE REGISTRATION TEMPLATE TABLE

No.	Date of receipt	Type of grievance	Description of grievance	Complainant		Date of acknowledgment of receipt	Description of actions undertaken	Date of solvation of grievance
				Status	Sex			

APPENDIX 3. REPORT ON PUBLIC DISCUSSION



JP Ceste Federacije BiH d.o.o. Sarajevo poziva sve zainteresirane subjekte, nevladine organizacije i stanovnike Grada Tuzla i naselja koja gravitiraju području namjeravane rekonstrukcije crne tačke, kružni tok „Husino“ u Tuzli, da uzmu učešće u

JAVNOJ RASPRAVI

o nacrtu Plana upravljanja okolišem i društvenim aspektima za projekat rekonstrukcije crne tačke, kružni tok „Husino“ u Tuzli

koja će se održati u Tuzli, u prostorijama Grada Tuzla 25.04.2018. godine u 09.00 sati, s ciljem davanja prijedloga i sugestija javnosti i uključivanja relevantnih pitanja u finalnu verziju dokumenta. Dokument je izrađen za potrebu Programa modernizacije magistralnih cesta u FBiH prema politikama kreditora. Nacrt dokumenta može se pronaći na službenoj stranici JP Ceste FBiH na sljedećem linku: <http://jpcfbih.ba/bs/aktivnosti/modernizacija-magistralnih-cesta/38> i na web stranici Grada Tuzla.

Svi zainteresirani subjekti koji nisu u mogućnosti da prisustvuju javnoj raspravi mogu svoje sugestije i komentare dostaviti do 25.04.2018. putem e-mail adrese: pimt@jpcfbih.ba.

Dnevni red:

1. Presentacija Plana upravljanja okolišem i društvenim aspektima za projekat rekonstrukcije crne tačke, kružni tok „Husino“ u Tuzli
2. Pitanja, diskusija, odgovori i objašnjenja



Web addresses containing the document and the Announcement of Public discussion with screenshots of the websites:

1. PC Roads of FBH website (published on April 5, 2018)

<https://jpcfbih.ba/bs/novosti/javna-rasprava-o-nacrtu-plana-upravljanja-okolisem-i-drustvenim-aspektima-za-projekat-rekonstrukcije-crne-tacke-kruzni-tok-husino-u-tuzli/39> - Announcement of the Public discussion (B/H/S language)

<http://jpcfbih.ba/bs/aktivnosti/modernizacija-magistralnih-cesta/38> - Document (B/H/S language)

<https://jpcfbih.ba/en/news/public-consultations-on-draft-environmental-and-social-management-plan-for-the-project-of-reconstruction-of-the-black-spot-roundabout-husino-in-tuzla/39> - Announcement of the Public discussion (English language)

<http://jpcfbih.ba/en/activities/modernization-of-main-roads/38> - Document (English language)



2. City of Tuzla website (published on April 16, 2018)

<http://grad.tuzla.ba/vijesti/poziv-na-javnu-raspravu-o-nacrtu-plana-upravljanja-okolisem-i-drustvenim-aspektima-za-projekat-rekonstrukcije-crne-tacke-kruzni-tok-husino-u-tuzli/>

http://grad.tuzla.ba/wp-content/uploads/2018/04/ESMP_27_%C5%A0i%C4%87ki-Brod-3-%C5%BDivinice1-km-2500-kruzna-raskrsnica-Husino.pdf



MINUTES of Public Consultation Meeting on the draft Environmental and Social Management Plan for the Project of Reconstruction of Black Spot Roundabout Husino in Tuzla

Public consultation meeting on the draft Environmental and Social Management Plan for the Project of Reconstruction of Black Spot Roundabout Husino in Tuzla was held on April 25, 2018 at 9 am in business premises of the City of Tuzla.

On behalf of the PC Roads of the Federation of Bosnia and Herzegovina, public consultation meeting was attended by:

- **Senad Smajlović** – Project Manager,
- **Selma Ljubijankić** – PIT Member in charge of social aspects of the Roads Modernization Program,
- **Haris Zejnić** – PIT member, assistant for EIA Monitoring under the Roads Modernization Program.

A list of all attendees is enclosed to these minutes.

Selma Ljubijankić welcomed the attendees, presented the representatives of the PC Roads of the FBiH and provided an overview of the Roads Modernization Program and the above document. She introduced the attendees to the draft Environmental and Social Management Plan for the Project of Reconstruction of Black Spot Roundabout Husino in Tuzla, including goals of its provision, mitigation measures of all potential identified environmental and social impacts, monitoring plan, information disclosure, grievance mechanism, requirements regarding work commencement and other relevant information.

It was pointed out that this is a draft document and that all relevant comments from this public consultation meeting will be incorporated into its final version. It was further clarified that the document was revised by the World Bank's team, and upon its approval, it will become a binding document for the contracting parties in the project implementation itself.

The project manager, **Senad Smajlović** presented an overview of the Project of Reconstruction of Black Spot Roundabout Husino in Tuzla, describing the scope of the project, its goals and implementation. It was pointed out that Black Spot Husino in Tuzla has been identified as one of the 10 priority black spots in the Federation of BiH. Off tracking control requirements are met on all intersection arms but one where the heavy goods vehicles and buses will have to make full circle inside the roundabout in order to exit.

Inasmuch as there is no pedestrian path, the speed limit is not respected, the no heavy goods vehicles and big vehicles signs were removed, there are crowds, etc. **Barbara Pavljašević** inquired if there is a way to increase road safety of the street from Siporex

intersection to roundabout. The access to roundabout has been pointed out as an issue, primarily during the works execution.

Senad Smajlović explains the responsibilities of the road management company that are clearly defined by the law. PC Roads of the FBiH is exclusively responsible for the main roads, while the above mentioned is categorized as a local road and therefore is under the jurisdiction of the City of Tuzla. Only the intersection and its arms up to 20 m distance from the main road are the responsibility of the PC Roads of the FBiH.

Tanja Marković, member of the local community council inquired about the design of footpaths at the roundabout. High speed in roundabout was mentioned as an issue. She further asked whether the monuments near the roundabout will be impacted, since it has been mentioned that no structure will be compromised. It was further clarified that a stone wall near the intersection should not be demolished or damaged.

Senad Smajlović explained the locations of footpaths which are located on all arms. Their advantage in relation to the present condition is elevated traffic island which will additionally protect pedestrians when crossing these streets. As it was not possible to provide underpasses on this section, footpaths are at the level of the crossing. It was further explained that the roundabout is designed to reduce driving speed (up to 30 km/h), under the increased traffic flow.

He pointed out that the monument to the soldiers of HVO shall remain intact and surrounded by a footpaths while the mentioned part of the wall have to be demolished to later brought to its original condition as before the commencement of works.

Ivica Marković asked about the design of accesses to post office.

Senad Smajlović replied that access to the post office and the square in front of the museum is solved by designing a new road while the nearby playground will have to be moved some 5 meters away.

Zlatko Kovačević, citizen of Tuzla pointed out the importance of the wall and roundabout surroundings. He inquired whether a traffic design made part of this project. The potential impact to pedestrians was emphasized as well. The driving culture has been recognized as an issue so the gentleman inquired about the traffic management plan during the works. He further underlined the importance the project has for the City of Tuzla and asked if it is a single lane roundabout and in what season the works are planned.

Senad Smajlović replied that all arms are designed to include the access zones with max gradient up to 4% so they will be adjusted in accordance with technical standards. Moreover, the traffic engineers took part in the development of this project too. The traffic signalling will be set up in a way to do not allow direct right turn for heavy goods vehicles. The concerned roundabout is designed as one traffic lane, and the works commencement is foreseen for the next year with a 90 days completion period. The works commencement depends on other factors (i.e. land acquisition etc.). It was stated that there is a possibility of

some traffic jams since there are no alternative roads. Work commencement will be advised in the media, while the traffic management plan shall remain the responsibility of the Federal Ministry of Transport and Communications.

Ratko Banović, NGO Eko zeleni Tuzla inquired why no cameras will be installed to record the driving speed over the section from Živinice to Šićki Brod. He expressed his opinion that environmental impacts will remain the same with the most probably no additional negative impacts to the air with potential partial improvement too. It was pointed out that attention should be paid during the work to avoid soil contamination, and suggested horticultural landscaping of the concerned area in the diameter of 50 meters from the roundabout. As for the noise impacts, it was inquired whether they will be monitored. He was pleased to note that cultural and historical monuments will remain intact.

Senad Smajlović explained that the installation of cameras is a responsibility of the Ministry of the Interior of the Tuzla Canton, and not of the PC Roads of the FBiH that is only responsible for the provision of authorizations for their instalment.

Selma Ljubijankić emphasized that as far as the soil contamination in case of leakage or spilling during the construction works, an EPR Plan shall be provided by the Contractor.

Haris Zejnić further explained that base line monitoring of soil impact has been foreseen prior to work commencement while there is no baseline monitoring for noise impact. However, the monitoring will be made in case of citizens' complaints.

Nenad Lukanović inquired about the lighting of the roundabout to what Senad Smajlović replied that the lighting has been provided.

Predrag Tomić asked if there is a possibility of access to the parking from the roundabout.

Senad Smajlović explained that there is no possibility to access parking directly from the roundabout, but through the nearby carriageway.

Samir Gabeljić, Ministry of Trade, Tourism and Traffic of Tuzla Canton inquired whether the traffic design provided the possibility of a bus stop as a niche, which would be more adequate from the point of passengers' safety.

Senad Smajlović emphasized that this solution is also been taken into consideration and that the effort will be made to solve the issue in this way.

Ivica Marković inquired about the land acquisition procedures and if they follow the declaration of public interest, which **Selma Ljubijankić** confirmed.

The public consultation meeting ended at 10.30 am.

Photographs of participants in the Public Consultations in Tuzla (business premises of Tuzla City)





List of Participants in the Public Consultations



Javna rasprava o Planu upravljanja okolišem i društvenim aspektima za projekat rekonstrukcije crne tačke, kružni tok „Husino“ u Tuzli, Tuzla, 25. april 2018.g.

LISTA SUDIONIKA / LIST OF PARTICIPANTS

R.b. No.	Ime i prezime / Name and surname	Institucija / Institution	Tel.	E-mail	Potpis / Signature
1	EDIN BAKIĆ	RTV 7	035/366-662	redakcija@rtv7.ba	Bakić Edin
2	MILAU ČOLIĆ	GRAD TUZLA	035/307345		Milau
3	MARGARA PAUČIĆ	GRAD TUZLA		urban@postoffice.gov.ba	Paučić Margara
4	ZOLEW-BOVANOVIĆ	GRAD TUZLA			Zolew
5	MAMETIĆ STIJAN	GRAD TUZLA	061270978		Mametić Stijan
6	PREDRAG TOPIĆ	—	—	—	P. Topić
7	IVICA MARKOVIĆ	GRAD TUZLA	061286144	ivica.markovic@gradtuzla.ba	Marković Ivica
8	RATKO BANOVKIĆ	EKO ZELENI TUZLA	06148320	ekozelezeni@tuzla.ba	Banovkić Ratko
9	TUKUJO MARKOVIĆ	MZ - HUSINO	035/41896	ČL. SAUJEZA	Marković Tukujo
10	ZLATKO KOVAČEVIĆ	GRAD TUZLA, GRAĐEVINARSTVO I INŽENJERING	035/307490	zlatkok@gradtuzla.ba	Kovačević Zlatko
11	SEAD SMAGIJOVIĆ	JR. OŠIJE FBiH	035/563516	sead@jrtfbih.ba	Smagić Sead
12	SAMIR GADEJVIĆ	MINISTARSTVO PROMETA TUZLA, ŠKOLARSKA TR.		Samir.gadevic@gradtuzla.ba	Gadević Samir



13	Bilal Tulumović	Kimeta isto sadije@tk			bilal.tulumovic@gmail.com	<i>[Signature]</i>
14	NENAD LUKANOVIC	Minist. trgovine i turizma	035 369 399		nensad.lukanovic@tuzla.ba	<i>[Signature]</i>
15	SEMA HUBIJAČIĆ	JP CESTE FBiH	033 563 519		sema.hubijacic@pfh.ba	<i>[Signature]</i>
16	HARIS BEJVIĆ	— — —	033 250 382		haris.bejvic@jefbih.ba	<i>[Signature]</i>
17	NEĐIHA NAHIDBAŠIĆ	GRAD TUZLA	051 308 510		nedimna@tuzla.ba	<i>[Signature]</i>
18						
19						
20						
21						
22						
23						
24						
25						
26						
27						
28						
29						